

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C

D

E

F

G

H

Material:

Standard:PBT

Contact: Phosphor Bronze,Au or Sn Over Ni
Insulator:Polyester,UL94V-0

Electrical Characteristics:

Rated Current:3.0AMP



Contact Resistance: 30mΩ Max
Withstand Voltage:1000V AC/DC

Insulator Resistance: 1000MΩ Min


Mechanical

Operating Temperature: -40°C ~ +105°C

Max.Processing Temp:180°C for 30-60 seconde
(200°C for 10 seconde)

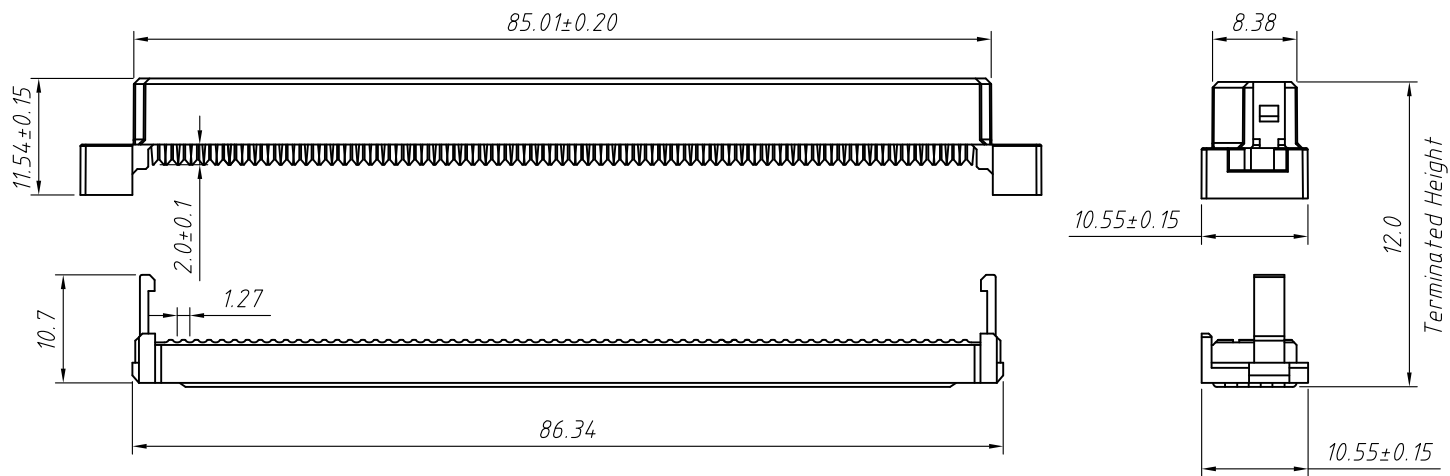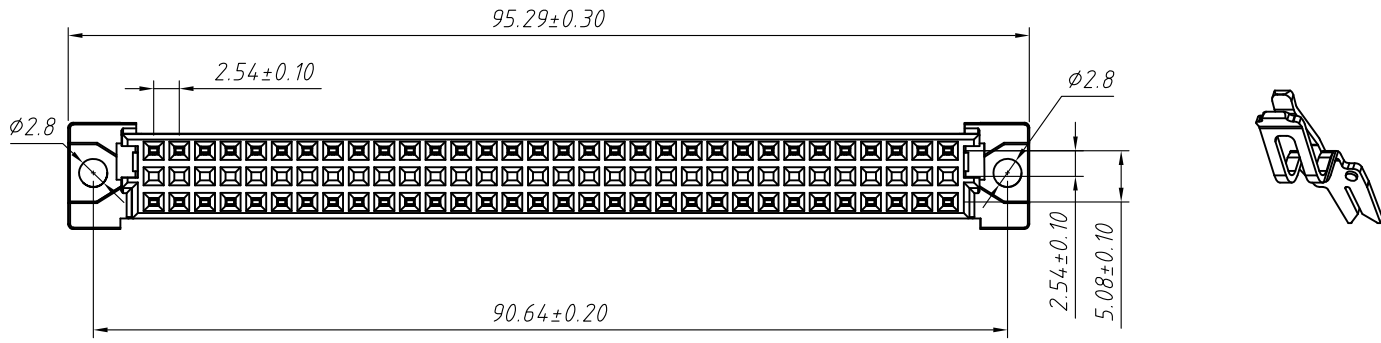

Order Information

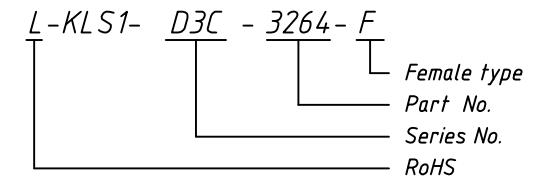

ANGLE TOLERANCE	PROJECTION	Description:	Din41612 3264 Female IDC-Type	
±2°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-D3C-3264-F
.X ±0.15	SHEET SIZE	A4		
.X ±0.03	Draw:	Daniel	2018-03-10	NingBo KLS ELECTRONIC CO.,LTD.
.XX ±0.05	Check:	Daniel	2018-03-10	

1 2 3 4 5 6 7 8