


Material  
 Housing: PA66, UL 94V-0  
 Pin header: Brass, Tin plated  
 Clamp: Brass, Ni plated  
 Screw: M2.5, steel Zinc plated

Electrical  
 Rated voltage: 300V  
 Rated current: 16A  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1 min  
 Wire Range: 22~12AWG 2.5mm<sup>2</sup>

Mechanical  
 Temp. Range: -40 °C ~ +105 °C  
 Strip length: 6~7mm  
 Torque: 0.4Nm (3.5Lb.in)

Order Information

L-KLS2-128D-7.50-XXP-4 S 00

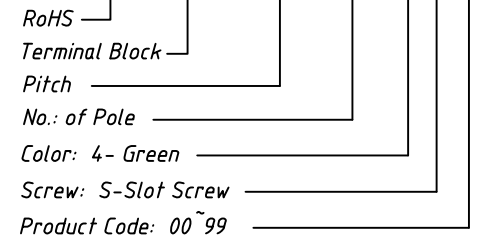

GENERAL TOLERANCE	ANGLE TOLERANCE	Description:
X. ±0.60	X. ±5°	Screw CONN TERM Block 7.50mm KLS P/N: KLS2-128D-7.50-XXP-4S
.X ±0.38	.X ±3°	
.XX ±0.25	.XX ±2°	
Draw by 2015-09-01	PROJECTION	NingBo KLS ELECTRONIC CO.,L TD.
Check by 2015-09-15	UNITS mm	
SCALE	SHEET SIZE A4	