



RoHS compliant

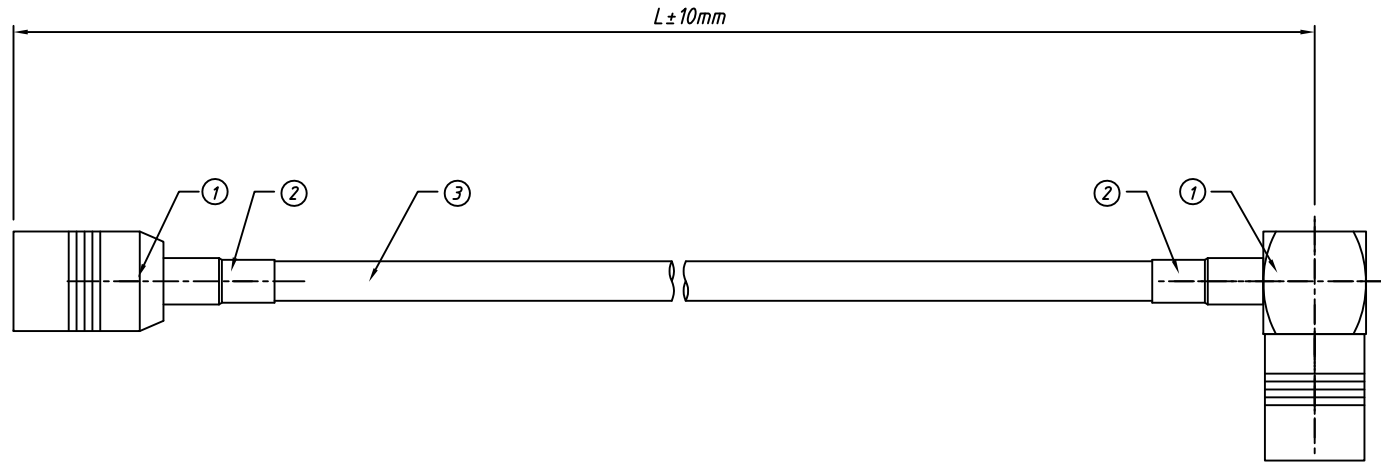

Order Information

L- KLS1- RFCA32 - RG316 - L300

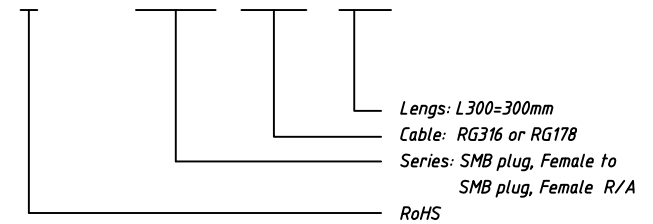

Note:

- 1: V.S.W.R: 1.5(0~3G), Max.
- 2: Wire surface shall have no dirt, broken.
- 3: Connector surface with coating, oxidation phenomenon.
- 4: Connector pins and insulator are in the same plane

4	Connetor	SMB plug,Female Right angle ,for RG316/RG174	PCS	1
3	RF Cable	RG316 or RG178 Cable	mm	L
2	Heat-Shrink Tube	Ø2.5mm Heat-Shrink Tube,Block,L15mm	PCS	2
1	Connetor	SMB plug,Female ,for RG316/RG174	PCS	1
No.	Name	Description	UNITS	Q'ty

		Description:	SMB plug,Female to SMB plug,Female R/A Cable			
PROJECTION						
UNITS	mm	KLS P/N:	L-KLS1-RFCA32-xxxx			
SHEET SIZE	A4	NingBo KLS ELECTRONIC CO.,L TD.				
Draw:	Daniel				2018-06-26	
Check:	Daniel				2018-06-26	