


Material
Housing: PA66, UL 94 V-0
Shrapnel: Stainless steel
Clamp: Phosphor bronze, Nickel plated

Electrical
Rated voltage: 150 V
Rated current: 5 A
Contact Resistance: 20 mΩ
Insulation resistance: 500 MΩ / DC 500 V
Wire Range: 26 ~ 20 AWG 0.5 mm²

Mechanical
Temp. Range: -40 °C ~ +105 °C
Strip length: 8 mm

Order Information

L-KLS2-EDGKD-2.50-XXP-4 00

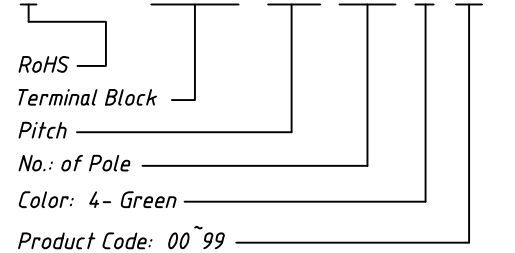

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:			
X. ±0.60	.X ±0.38	.XX ±0.25		X. ±5°	.X ±3°	.XX ±2°	Pluggable Terminal Block 2.5 MM
Draw by	2015-09-01	PROJECTION		KLS P/N:	KLS2-EDGKD-2.50-XXP-4-00		
Check by	2015-09-15	UNITS	mm			NingBo KLS ELECTRONIC CO.,L TD.	
SCALE		SHEET SIZE	A4				