

PCB LAYOUT


**Material**  
Housing: PA66, UL 94V-0  
Pin header: Brass, Tin plated

**Electrical**  
Rated voltage: 150V  
Rated current: 5A  
Contact Resistance: 20 m Ω  
Insulation resistance: 500MΩ/DC500V  
Withstand voltage: AC1250V / 1 min

**Mechanical**  
Temp. Range: -40 °C ~ +105 °C

**Order Information**

L-KLS2-EDR-2.50-XXP-4 00

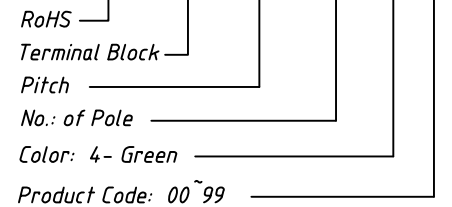

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	
X. ±0.60		X. ±5°		Pluggable Terminal Block 2.5 MM	
.X ±0.38		.X ±3°			
.XX ±0.25		.XX ±2°		KLS P/N:	KLS2-EDR-2.50-XXP-4-00
Draw by	2015-09-01	PROJECTION			NingBo KLS ELECTRONIC CO.,L TD.
Check by	2015-09-15	UNITS	mm		
SCALE		SHEET SIZE	A4		