


**Electrical :**  
 Rated Voltage: 450V(IEC/ENI/300V(UL))  
 Rated Current: 16A  
 Contact resistance: 20 mΩ  
 Insulation resistance: 5000MΩ/DC1000V  
 Withstanding voltage: AC2500V/1 min  
 Cross Section: Solid conductor & Stranded conductor  
 A holes: 0.5-2.5mm<sup>2</sup>/14-20AWG  
 B holes: 0.5-1.5mm<sup>2</sup>/16-20AWG  
 C holes: 0.5-2.5mm<sup>2</sup>/14-20AWG


**Materials**  
 Insulation Materials: PA 66,WHITE,UL94V-2  
 Contact: Copper,Nickel Plated  
 Wire guard: Stainless steel

Number of poles: 3 poles  
 Strip length: 8-10mm  
 Operating Temperature: -40°C~+105°C

**ORDER INFORMATION**

L-KLS2- 238M - 03P X X

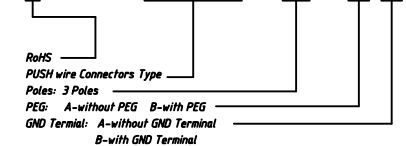

GENERAL TOLERANCE		ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.60	±2°	UNITS	mm	PUSH wire Connector
.X ±0.38		SHEET SIZE	A4	
.XX ±0.25		KLS P/N:		L-KLS2-238M-03Pxx
Draw: Daniel	2018-08-27	 NingBo KLS ELECTRONIC CO.,L TD.		
Check: Daniel	2018-08-27			
SCALE	SHEET			