


**Electrical :**  
 Rated Voltage: 450V(IEC/ENI)/300V(UL)  
 Rated Current: 16A  
 Contact resistance: 20 m $\Omega$   
 Insulation resistance: 5000M $\Omega$ /DC1000V  
 Withstanding voltage: AC2500V/1 min  
 Cross Section: Solid conductor & Stranded conductor  
 A holes: 0.5-2.5mm<sup>2</sup>/14-20AWG  
 B holes: 0.5-1.5mm<sup>2</sup>/16-20AWG  
 C holes: 0.5-2.5mm<sup>2</sup>/14-20AWG


**Materials**  
 Insulation Materials: PA 66,WHITE,UL94V-2  
 Contact: Copper,Nickel Plated  
 Wire guard: Stainless steel

Number of poles: 5 poles  
 Strip length: 8-10mm  
 Operating Temperature: -40°C ~ +105°C

**ORDER INFORMATION**

L-KLS2- 238M - 05P X X

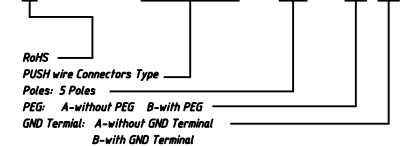

GENERAL TOLERANCE		ANGLE TOLERANCE	PROJECTION	Description:
X. $\pm 0.60$	$\pm 2^\circ$	UNITS	mm	PUSH wire Connector
.X $\pm 0.38$		SHEET SIZE	A4	
.XX $\pm 0.25$		KLS P/N:		L-KLS2- 238M -05Pxx
Draw: Daniel	2018-08-27	 NingBo KLS ELECTRONIC CO.,L TD.		
Check: Daniel	2018-08-27			
SCALE	SHEET			