

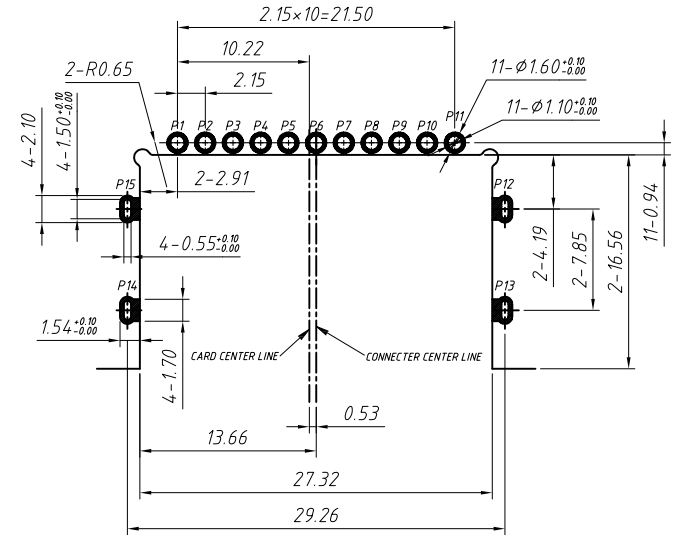
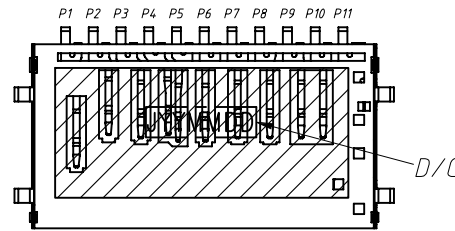

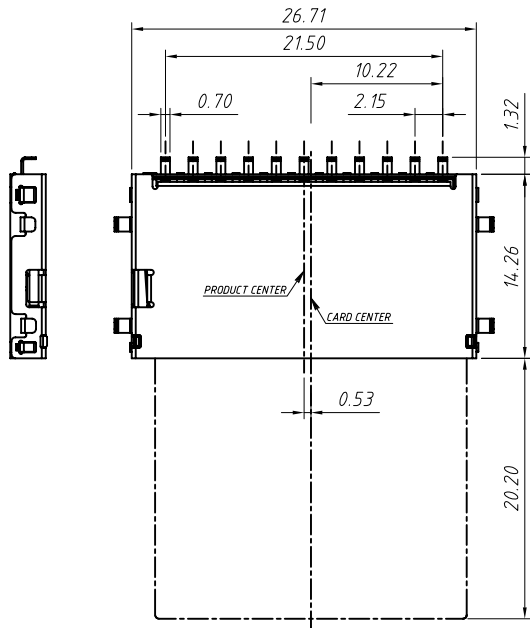


WITHOUT ACRD		CARD INSERTED-LOCK		CARD INSERTED-UNLOCK	
W/P	GND	W/P	GND	W/P	GND
C/D	VSS1	C/D	VSS1	C/D	VSS1
	P3		P3		P3

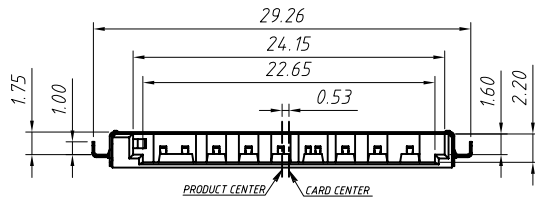

RECOMMEND PCB LAYOUT

TOLERANCE:±0.05

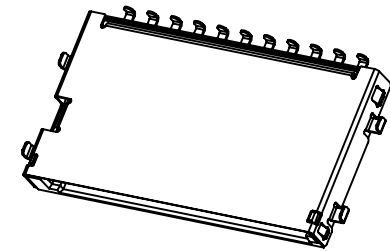

Connector Pin No.	SD Card Pin No.	Pin Define
P1	P9	DAT3
P2	P1	DAT3
P3	P2	CMD
P4		CD
P5	P3	VSS1
P6	P4	VDD
P7	P5	CKL
P8	P6	VSS2
P9	P7	DAT0
P10	P8	DAT1
P11		WP
P12-P15		GND

Material:

Housing:LCP S475,UL 94V-0.Black.

Shell:Stainless Steel SUS304.


Contact:Copper Alloy C5210.

Finish:

Contact:Gold Plated on Contact Area.Matte Tin 100u"

Min On Solder Tail Area.50u" Min Nickel Plating Overall.

Shell:30u" Min Solderable Nickel Plating Overall.

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	SD Card CONN,Reverse MID MOUNT 1.75mm,DIP with CD Pin
X ±0.15	X ±5°	UNITS	
.X ±0.03	.X ±3°	SHEET SIZE	A4
.XX ±0.05	.XX ±2°		KLS P/N: L-KLS1-SD003-R
Draw by: Jenny	Date: 2018-03-10	 NingBo KLS ELECTRONIC CO.,LTD.	
Check by:	Date: 2018-03-10		
SCALE	SHEET 1 OF 1		