
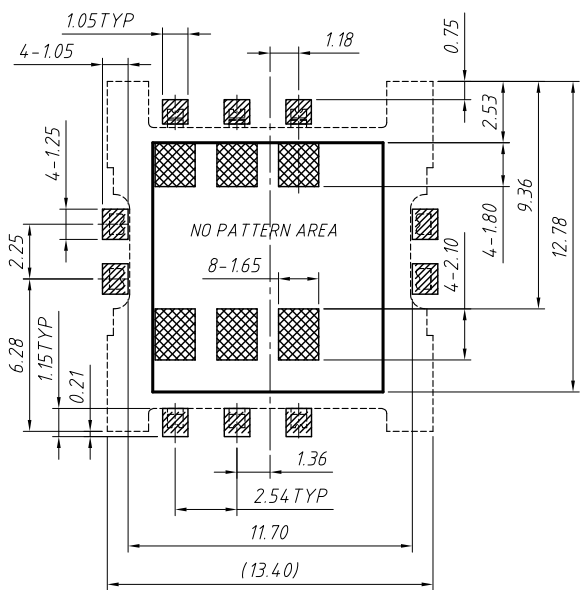
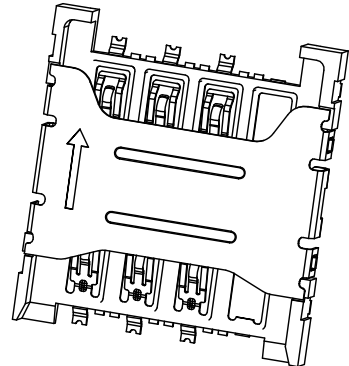
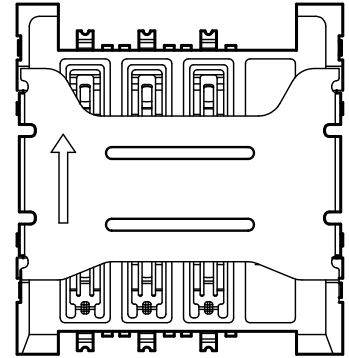


Material
 Housing: Thermoplastic, UL 94 V-0.
 Terminal: Copper Alloy, Gold Plated On Contact Area and Solder Tails, Nickel Plated Overall.
 Shell: Stainless Steel, Nickel Plated Overall, Gold Plated On Solder Tails.

Electrical:
 Current Rating: 1.0 A max.
 Contact Resistance: 30mΩ Max.
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 1000MΩ Min./500V DC
 Operating Temperature: -40°C TO +85°C.



PCB AREA
 CONNECT AREA
 KEEP OUT AREA
 RECOMMENDED PCB LAYOUT
 TOLERANCE ±0.05 TOP VIEW

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.15	X. ±5°	UNITS	mm
.X ±0.03	.X ±3°	SHEET SIZE	A4
.XX ±0.05	.XX ±2°	KLS P/N:	L-KLS1-SIM-099-6P-H1.5-R

Draw by:	Jenny	Date:	2018-03-10
Check by:		Date:	2018-03-10
SCALE		SHEET	1 OF 1

NingBo KLS ELECTRONIC CO.,L TD.