


Material
 Housing: 30% Glass filled PBT UL94V-0, Blue
 Terminal :copper alloy(T=0.25mm), Au Plated
 on contact area; Tin Plated on solder area;
 Shell : Brass,Nickel plated

Electrical
 Current Rating: 18A for pin 1 & pin 4
 0.25A other contacts
 Contact Resistance: 30m Ohm Max. for pin
 1 & pin 4 50m Ohm Max.
 for other contacts
 Insulator Resistance: 100M Ohm Min.
 Dielectric Withstanding Voltage:100 VAC/Minute

Mechanical
 Operating Temperature:-55°C TO +85°C.
 Mating Force: 35N MAX
 Unmating Force: 10N MIN.

Order Information

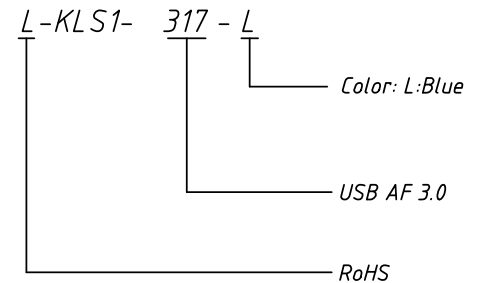

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.60	X. ±5°	UNITS	USB 3.0 Connector With A Type Female Dip 90 L-KLS1-317-L
.X ±0.38	.X ±3°	SHEET SIZE	
.XX ±0.25	.XX ±2°	KLS P/N:	

Draw by: Date 2023-04-24
 Check by: Date 2023-04-24

KLS NingBo KLS ELECTRONIC CO.,L TD.

SCALE SHEET OF