


P.C.B LAYOUT

Material:
Housing: Thermoplastic, Glass Fiber Filled, Halogen Free, UL 94-HB, Color: Blue.
Cover: Thermoplastic, Glass Fiber Filled, Halogen Free, UL 94V-0, Color: Black.
USB 2.0 Contact: Copper Alloy.
USB 3.0 Contact: Copper Alloy.
Shell: Brass/SPCC

Electrical
Contact Current Rating: 1.5 A For PIN1&PIN4 0.25 A ,Other Contacts.
Withstanding Voltage: 100VAC(RMS)
Contact Resistance: 30mΩ MAX
Insulator Resistance: 1000MΩ MIN

Mechanical
Mating Force: 35N MAX
Withdrawal: 10N MIN
Durability: 5000 CYCLES
Temperature Range: -40°C ~ +85°C

Order Information

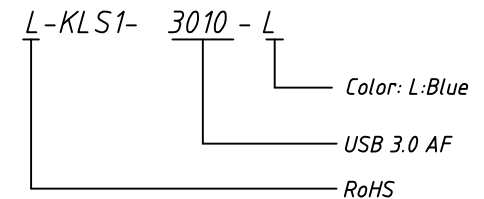

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.60	X. ±5°	UNITS	USB 3.0 Type A Female, SMD
.X ±0.38	.X ±3°	SHEET SIZE	
.XX ±0.25	.XX ±2°	KLS P/N:	

Draw by: Date	2018-03-01
Check by: Date	2018-03-01
SCALE	SHEET OF

NingBo KLS ELECTRONIC CO.,L TD.