



**Material**  
 Housing: PBT,UL 94V-0  
 Shell :SPCC,Cu: 80U"Min,Ni:80U"Min  
 Terminal :4P Phosphor Bronze ;5P Brass  
 Ni:50U"Min / Sn:100U"Min

**Electrical**  
 Voltage Current Rating:2AMP,30V AC  
 Insulator Resistance: 100MΩ Min  
 Contact Resistance: 50mΩ Max  
 Withstanding Voltage: 300V AC

**Mechanical**  
 Operating Temperature:-55°C TO +85°C.  
 Mating Force: 35N MAX  
 Unmating Force: 10N MIN.

**Order Information**

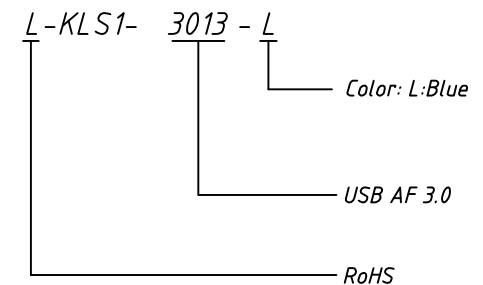

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X.	±0.60	X.	±5°	UNITS	mm	USB 3.0 Type A Female CONN. Solder	
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°	KLS P/N:			
Draw by: Date		2018-03-01		 NingBo KLS ELECTRONIC CO.,L TD.			
Check by:: Date		2018-03-01					
SCALE		SHEET				OF	