
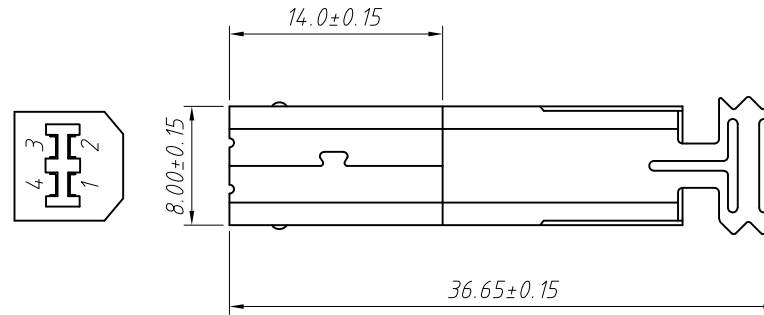


Material:
 Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Phosphor Bronze
 Pin Plated: Gold 3u" over 50u" nickel

Electrical:
 Current Rating: 1 AMP
 Insulator Resistance: 1000M Ohm min. at 500 VDC
 Dielectric Withstanding Voltage: 500 VAC / Minute
 Contact Resistance: 30m Ohm max.
 Temperature: -55° C ~ +105° C

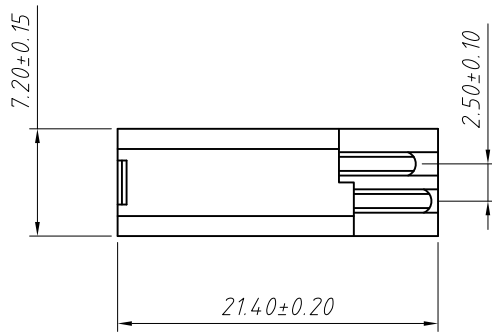

Order Information

L-KLS1- 184 - B
 Color: W=White B=Black
 USB 2.0
 RoHS

GENERAL TOLERANCE		PROJECTION		Description:
X. ±0.50		UNITS	mm	CONN PLUG USB B-MALE SOLDER
.X ±0.25		SCALE	1:1	
.XX ±0.10		Draw by:	Jenny	KLS P/N: L-KLS1-184-X
ANGLE TOLERANCE		Check by:		NingBo KLS ELECTRONIC CO.,L TD.
X. ±5°	Date	2018-03-01		
.X ±3°	SHEET	1 OF 1		
.XX ±2°				