


Material:
 Insulator: PBT Rated UL94V 0
 Contacts: Brass
 Shell: Cold Rolled Steel
 Pin Plated: Gold 3u" over 50u" nickel

Electrical:
 Current Rating: 1.0 Amps Max.
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 1000 MΩ Min
 Dielectric Withstanding Voltage: 500 VAC / Minute

Mechanical:
 Mating force: 3.0Kg Max. (29.4N)
 Unmating force: 0.5Kg Min (4.9N)
 Contact Retention: 0.3 Kg / Pin Min. (2.94N)
 Operating Temperature: -55° C ~ +105° C

Order Information

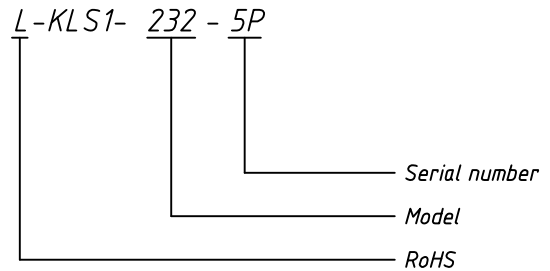

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.30	UNITS	mm	MINI USB TYPE B PLUG CABLE KITS
.X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-232-5P
X. ±3°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±2°	SHEET	1 OF 1	
.XX ±1°			