


Material
 Housing:Hing Temperature Thermoplastics,
 UL 94 V-0 LCP,Black.
 Contact:Copper Alloy C2680.
 Shell:Copper Alloy C2680.

Finish:
 Contact:Plated Gold In Mating Area;
 Tin On Solder Talls.
 Shell:Nickel Plating.

Electrical:
 Current Rating:1.0A/Contact Terminal.
 Voltage Rating:30V DC
 Contact Resistance:50mΩ Max.
 Dielectric Withstanding Voltage:
 300 V AC AT Sea Level.
 Insulation Resistance:100MΩ Min.
 Connector Mate and Unmated Force
 Mate Force:3.0kgf Max.
 Unmated Force:0.7kgf Min.
 Terminal Retention:0.5kgf Min.

Order Information

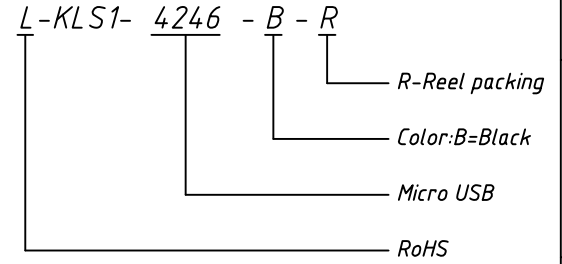

RECOMMENDED PCB LAYOUT
 TOL:±0.05

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	CONN RCPT 5POS MICRO USB SMD
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-4246-B-R
X. ±5°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°	SHEET	1 OF 1	
.XX ±2°			