


MATERIAL
 Insulator: PP,Black,UL 94HB
 Contact: 0.8x1.0mm, 65C Steel Spring,
 Nickel plated
 PC Pin: φ0.8x28mm,Brass, Nickel plated
 Rivet: Brass,Nickel plated
 Temperature Range:-10°C ~ +80°C

ORDER INFORMATION:
 L - KLS5 - 18650 - 009 - D X
 RoHS
 4 Li-ion 18650 Battery Holder
 D : with PC Pin
 Circuit :
 S-Series connection
 P-Parallel connection

RECOMMENDED PCB LAYOUT
 TOLERANCE:±0.05

GENERAL TOLERANCE	±0.50	PROJECTION	Description:	4 Li-ion 18650 Battery Holder,with PC Pin
		UNITS		
Angle TOLERANCE	±3°	SHEET SIZE	A4	
		KLS P/N:		L-KLS5-18650-009-D X
Draw:	Daniel			
Check:	Daniel			
Data:	2019-03-08			

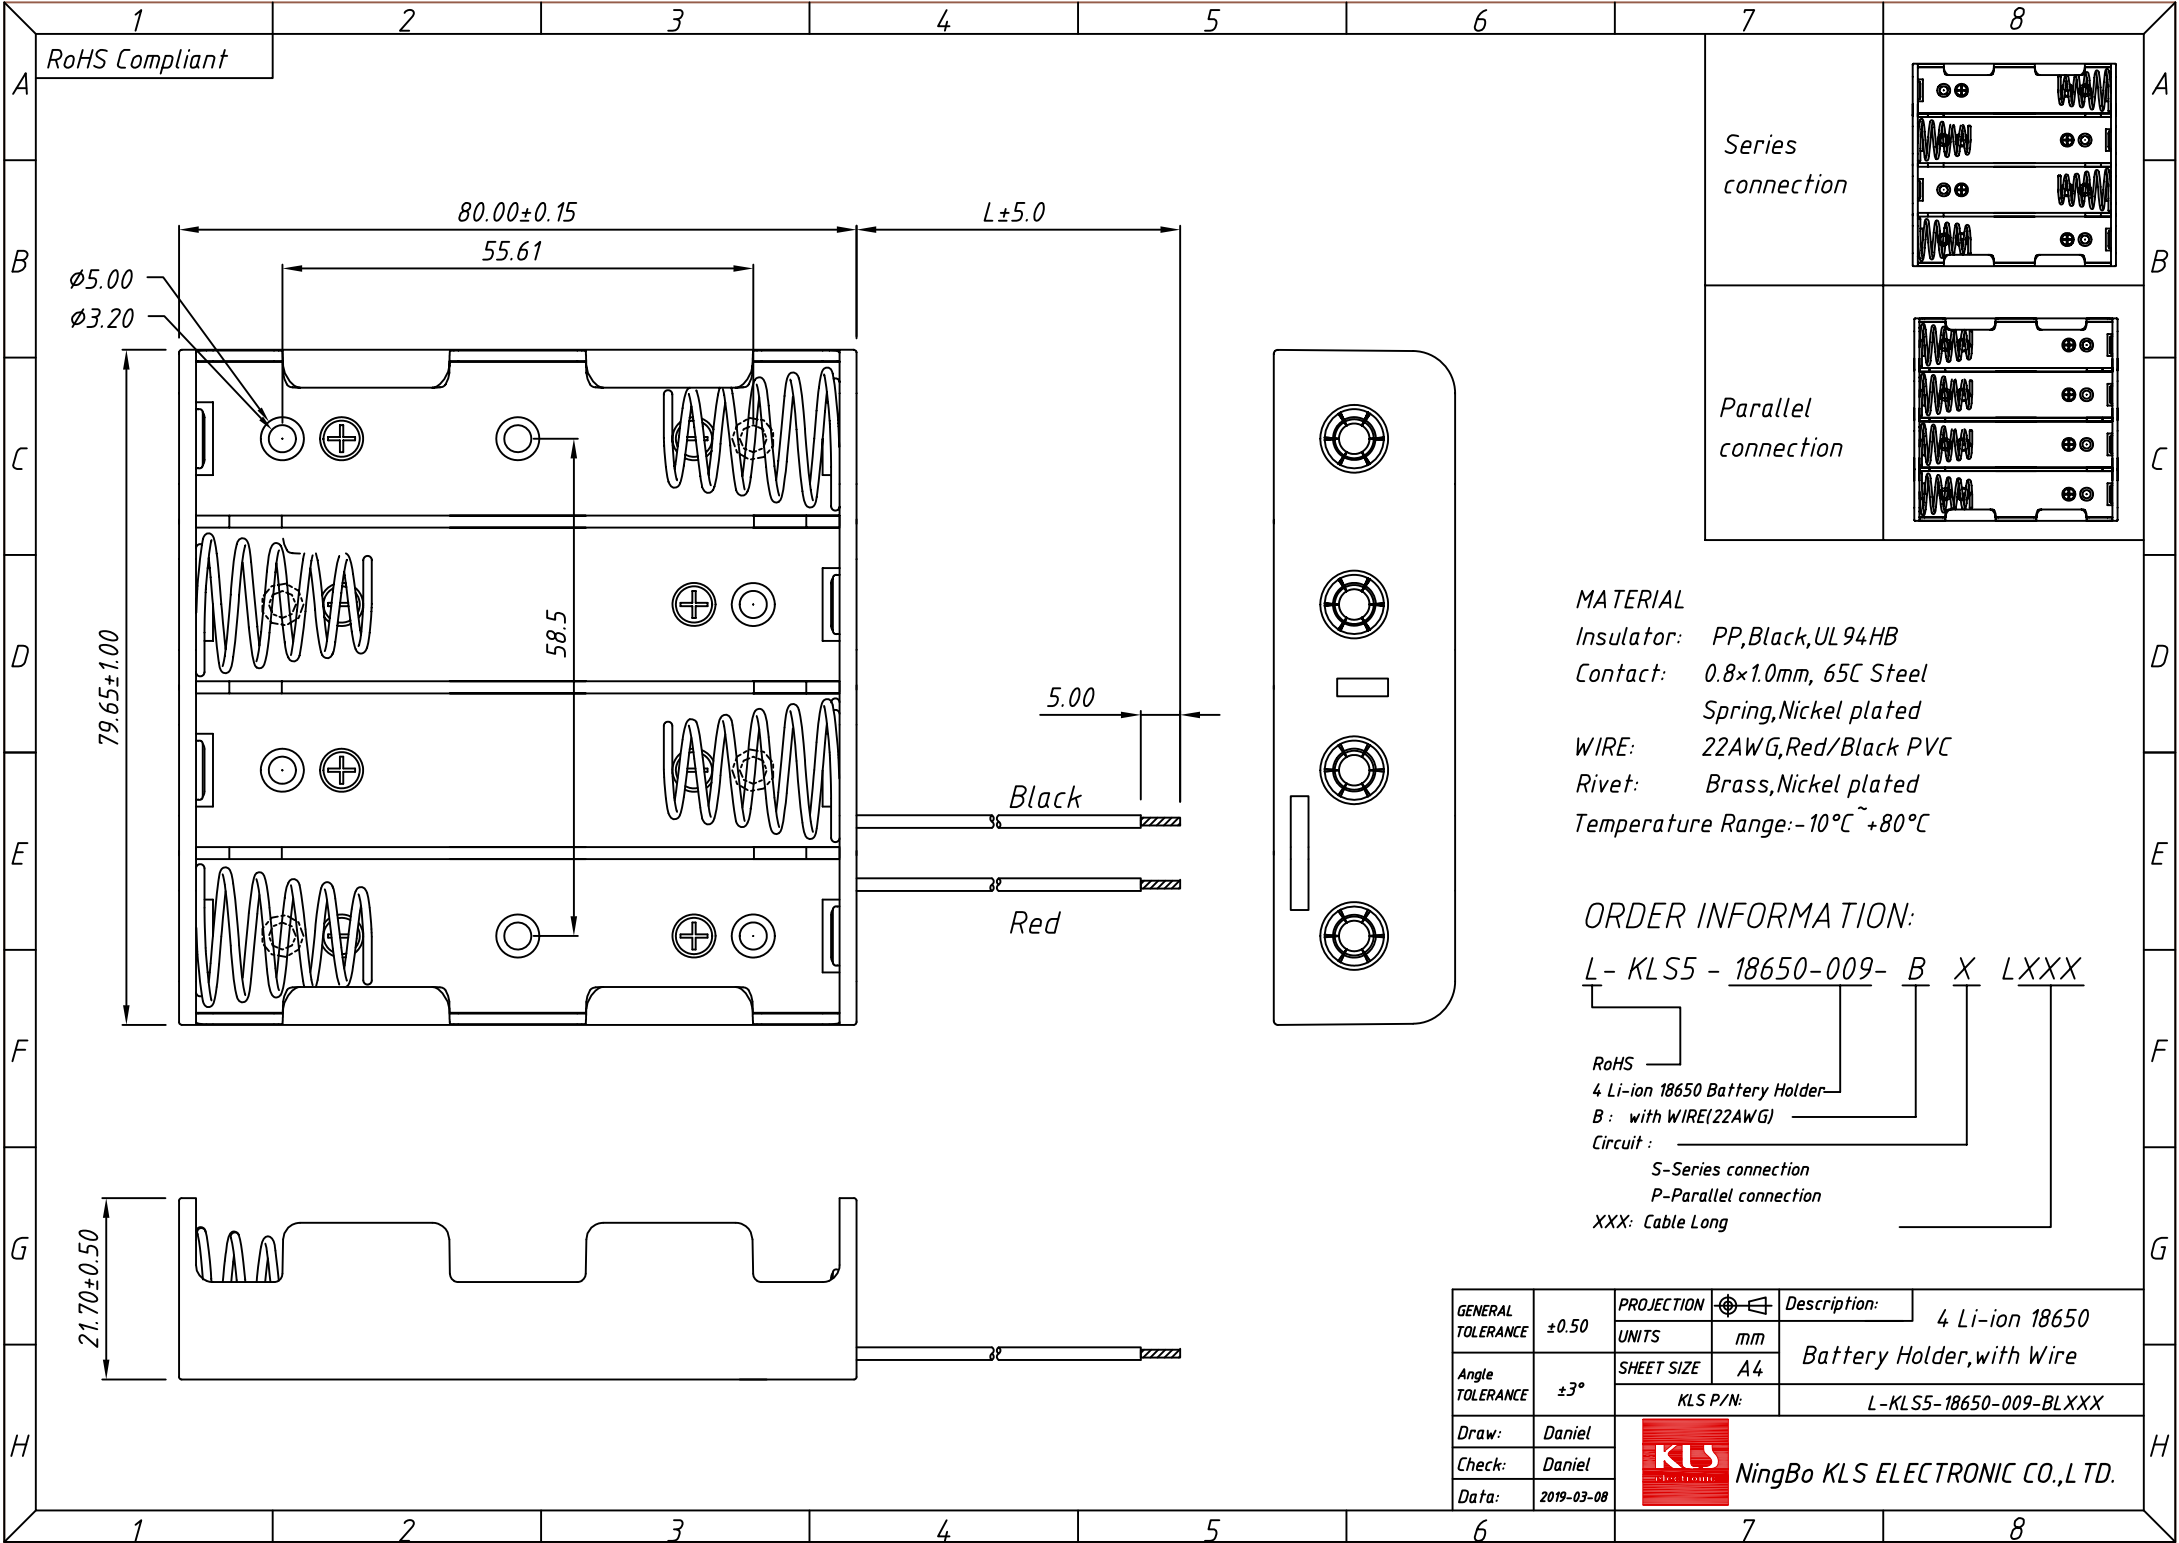

RoHS Compliant

Series connection

Parallel connection

MATERIAL

Insulator: PP,Black,UL 94HB

Contact: 0.8x1.0mm, 65C Steel

Spring,Nickel plated

WIRE: 22AWG,Red/Black PVC

Rivet: Brass,Nickel plated

Temperature Range:-10°C ~ +80°C

ORDER INFORMATION:

L - KLS5 - 18650-009- B X LXXX

RoHS

4 Li-ion 18650 Battery Holder


B : with WIRE(22AWG)

Circuit :

S-Series connection

P-Parallel connection

XXX: Cable Long

GENERAL TOLERANCE	±0.50	PROJECTION	Description:	4 Li-ion 18650 Battery Holder,with Wire
		UNITS		
Angle TOLERANCE	±3°	SHEET SIZE	L-KLS5-18650-009-BLXXX	
		KLS P/N:		
Draw:	Daniel	 NingBo KLS ELECTRONIC CO.,L TD.		
Check:	Daniel			
Data:	2019-03-08			