

Mounting Hole Dimensions


Remarks:

1. Terminal: Gold Plated solid pin;
2. Plastic material: PA66
3. Waterproof grade: IP67;
4. Rated current / voltage: 10A / 300V;
5. Insulation resistance: > 500m $\Omega$ ;
6. The product conforms to RoHS CE;

No.	Solder inter diamte	Contacts resistance Max.
2	$\phi 1.6mm$	6 m $\Omega$
3	$\phi 1.6mm$	6 m $\Omega$
4	$\phi 1.0mm$	3 m $\Omega$
5	$\phi 1.0mm$	3 m $\Omega$
6	$\phi 1.0mm$	3 m $\Omega$
7	$\phi 1.0mm$	3 m $\Omega$
8	$\phi 1.0mm$	3 m $\Omega$

Order Information

L-KLS15-249-4M3

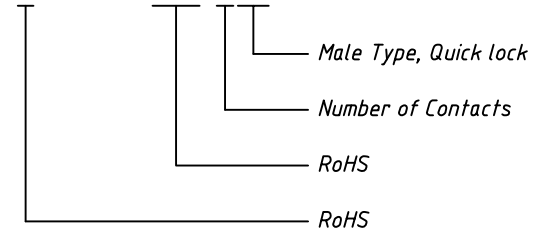

2P	3P	4P	5P	6P	7P	8P
10A 300V	10A 300V	10A 125V	18A 125V	10A + 5A 125 + 60V	5A 60V	5A 60V

GENERAL TOLERANCE	PROJECTION		Description:
X. $\pm 0.50$	UNITS	mm	IP67 M16 Male Jack
.X $\pm 0.25$	SCALE	1:1	
.XX $\pm 0.10$	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS15-249-4M3
X. $\pm 5^\circ$	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X $\pm 3^\circ$	SHEET	1 OF 1	
.XX $\pm 2^\circ$			