


Remarks:

1. Terminal: Gold Plated solid pin;
2. Plastic material: PA66
3. Waterproof grade: IP67;
4. Rated current / voltage: 10A / 300V;
5. Insulation resistance: > 500mΩ;
6. The product conforms to RoHS CE;
7. It can pass through 2-8mm cable;

No.	Solder inter diante	Contacts resistance Max.
2	φ1.6mm	6 mΩ
3	φ1.6mm	6 mΩ
4	φ1.0mm	3 mΩ
5	φ1.0mm	3 mΩ
6	φ1.0mm	3 mΩ
7	φ1.0mm	3 mΩ
8	φ1.0mm	3 mΩ

Order Information

L-KLS15-249-4F3

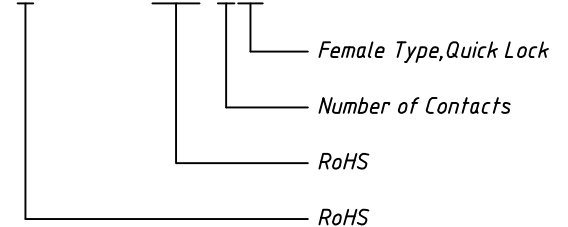

2P	3P	4P	5P	6P	7P	8P
10A 300V	10A 300V	10A 125V	18A 125V	10A + 5A 125 + 60V	5A 60V	5A 60V

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	IP67 M16 Female Type
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS15-249-4F3
X. ±5°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°	SHEET	1 OF 1	
.XX ±2°			