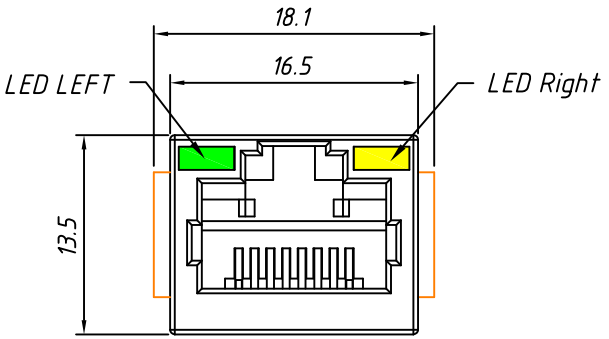

With Panel



Without Panel



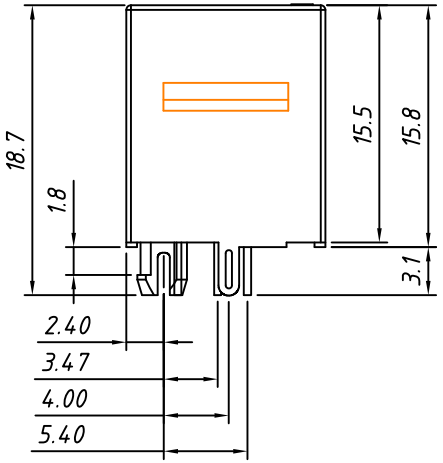

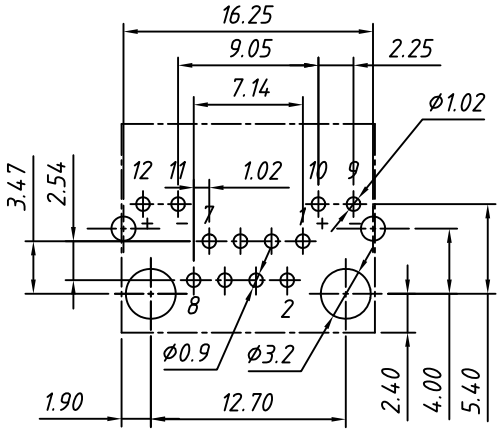

PCB Layout

Single Color LED



Bi-Colour LED



Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating : UL94V-0
Contacts: Phosphor Bronze Ø0.46mm
Plating: Gold Plating
Shield: Brass, Tin Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ +70°C

Order Information

L-KLS12- 163 -8P8C-1 - G/Y- XX

RoHS
Contacts: 8P8C
Panel: 1- with Panel
0- without Panel
LED Code: LEFT/RIGHT
G/Y-Green/Yellow
Y/G-Yellow/Green
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

GENERAL TOLERANCE	PROJECTION		Description: RJ45-8P8C Low Profile Modular jacks, with LED
X. ±0.30	UNITS	mm	
.X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Jenny	KLS P/N: L-KLS12-163-8P8C-X-X/X-XX
ANGLE TOLERANCE	Check by:	Daniel	
X. ±3°	Date	2019-12-26	NingBo KLS ELECTRONIC CO.,LTD.
.X ±2°			
.XX ±1°	SHEET	1 OF 1	