

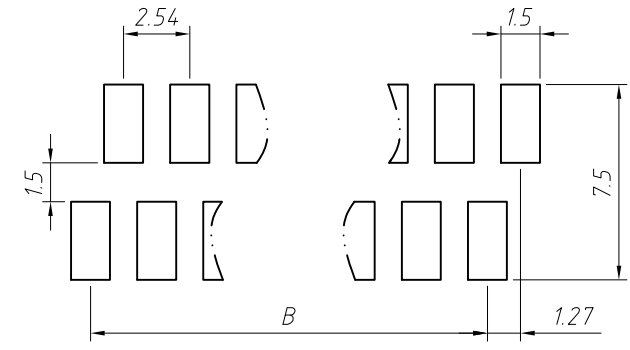
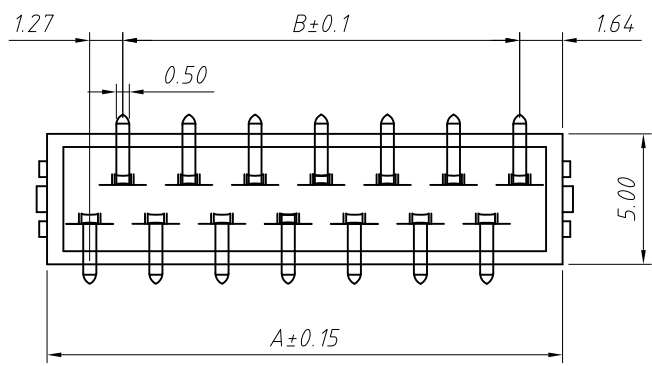



1
RoHS Compliance

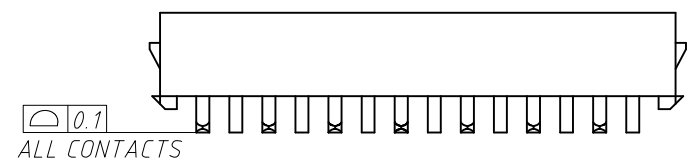

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)




Material:
Housing: PA46/PA9T, UL94V-0
Contacts: Brass
Plating: Sn over 50u" nickel

Electrical Characteristics:
Current Rating: 1.0 AMP
Contact Resistance: 20m Ohm max.
Insulator Resistance: 1000M Ohm min.
Withstand voltage: 500V AC
Operating Temperature: -40°C ~ +105°C

Order Information:
L-KLS1-204H-XX-R-□-□

L: RoHS
Pitch: 2.54mm
XX-No. of 04 ~ 26pin
Color: R-Red B-Black
Material:
NONE=PA9T E=PA46
Packing: NONE=Tube R=Reel

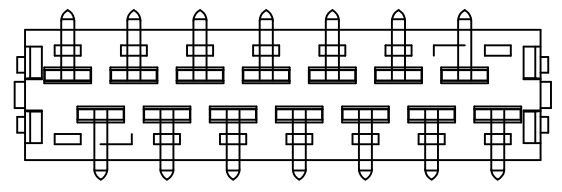

Poles	DIM.A	DIM.B	Qty/Tube	Poles	DIM.A	DIM.B	Qty/Tube
04	7.20	2.54	68	16	22.44	17.78	24
06	9.74	5.08	52	18	24.98	20.32	22
08	12.28	7.62	42	20	27.52	22.86	20
10	14.82	10.16	36	22	30.06	25.40	18
12	17.36	12.70	31	24	32.60	27.94	17
14	19.90	15.24	27	26	35.14	30.48	16

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		Micro Match Connector Male SMD Type		
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-204H-XX-R-□-□
x.x	±0.30	SHEET SIZE	A4	
x.xx	±0.20	Draw:	Daniel 2018-07-10	
x.xxx	±0.10	Check:	Daniel 2018-07-10	

KLS NingBo KLS ELECTRONIC CO.,L TD.