


RECOMMENDED P.C.B LAYOUT  
COMPONENT SIDE(TOLERANCE ±0.05)

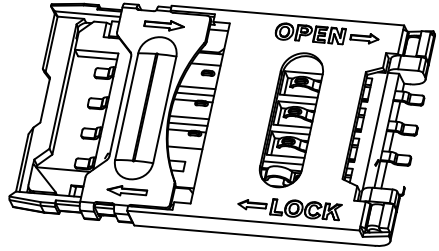

Material;  
Housing:LCP UL94V-0  
Contact Terminal:Phosphor Bronze  
Metallic Shell:Stainless Steel-SUS304

Plating:  
Contact Terminal Plating  
Contact Area:5μ" Gold  
Soldering Area:100μ" Tin  
Under-plating:50μ" Nickel above

Electrical:  
Voltage Rating:50 V max  
Current Rating:1A max  
Operating Temperature:-40°C to +85°C  
Contact Resistance:50 mΩ typical,100mΩ max  
Insulating Resistance:1000 mΩ min.Apply 500V DC  
Dielectric Withstanding Voltage:500 VAC for 1 minute

Mechanical:  
Durability :min 5,000 cycles

Packing:  
R=Roll Pack T=Tube Pack

GENERAL TOLERANCE	PROJECTION		Description:
.X ±0.50	UNITS	mm	SIM card connectors with switch
.X ±0.25	SCALE	2:1	
.XX ±0.10	Draw by:	Jenny	KLS P/N: L-KLS1-SIM-012C-(6+2)P-R
ANGLE TOLERANCE	Check by:		NingBo KLS ELECTRONIC CO.,L TD.
.X ±5°	Date	2018-03-01	
.X ±3°	SHEET	1 OF 1	
.XX ±2°			