



SCHMATIC

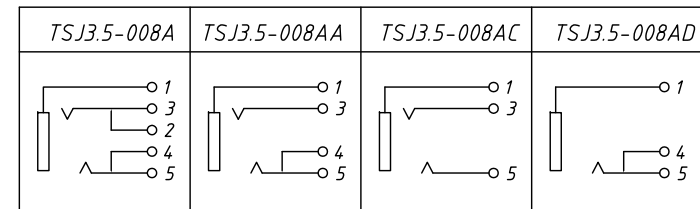

Material:

- 1.Flat Piece:H62 Brass,Ag-Plating
- 2.Curve Piece:H62 Brass,Ag-Plating
- 3.Spring Piece:Phosphor Bronze,Ag-Plating
- 4.Curve Piece:H62 Brass,Ag-Plating
- 5.Spring Piece:Phosphor Bronze,Ag-Plating
- 6.Axis Support:H59 Brass,Ni-Plating
- 7.Cover:PBT
- 8.Housing:PBT

Specification:

- 1.Rating:DC 50V 0.5A
- 2.Contact resistance:≤0.03Ω
- 3.Insulation resistance:≥100MΩ (DC250V)
- 4.Withstand voltage:500VAC
- 5.Insertion and extraction force:3-20N
- 6.life test:5,000 cycles
- 7.Colour:G=Green

| GENERAL TOLERANCE | PROJECTION | | Description: |
|-------------------|------------|------------|---------------------------------------|
| X. ±0.50 | UNITS | mm | 3.5mm Stereo Phone Jack For PCB Mount |
| .X ±0.25 | SCALE | 2:1 | |
| .XX ±0.10 | Draw by: | Jenny | KLS P/N: L-KLS1-TSJ3.5-008A-G |
| ANGLE TOLERANCE | Check by: | | NingBo KLS ELECTRONIC CO.,L TD. |
| X. ±5° | Date | 2018-03-01 | |
| .X ±3° | SHEET | 1 OF 1 | |