
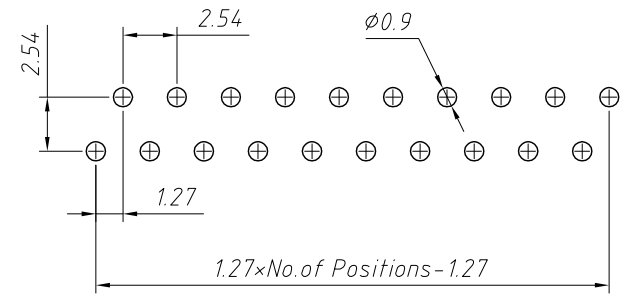
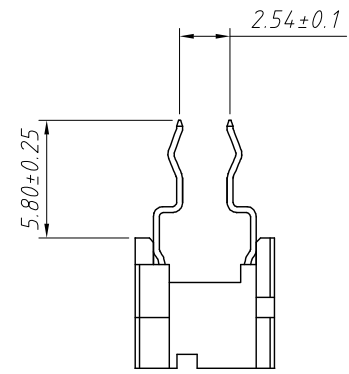
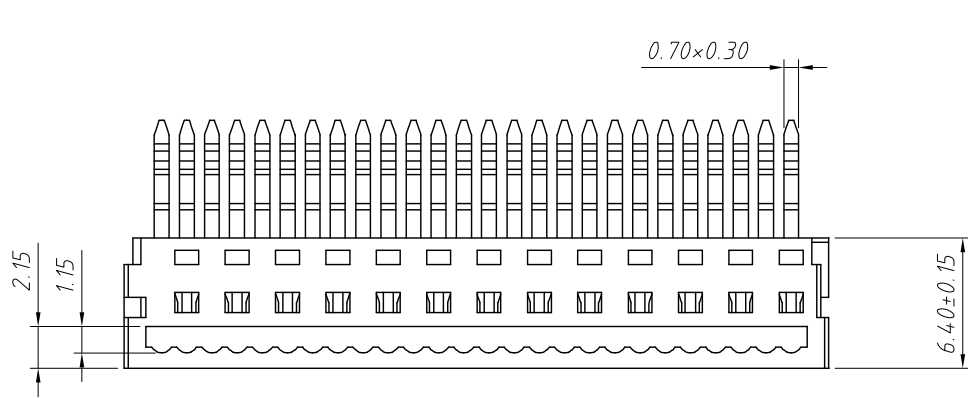


RoHS Compliance

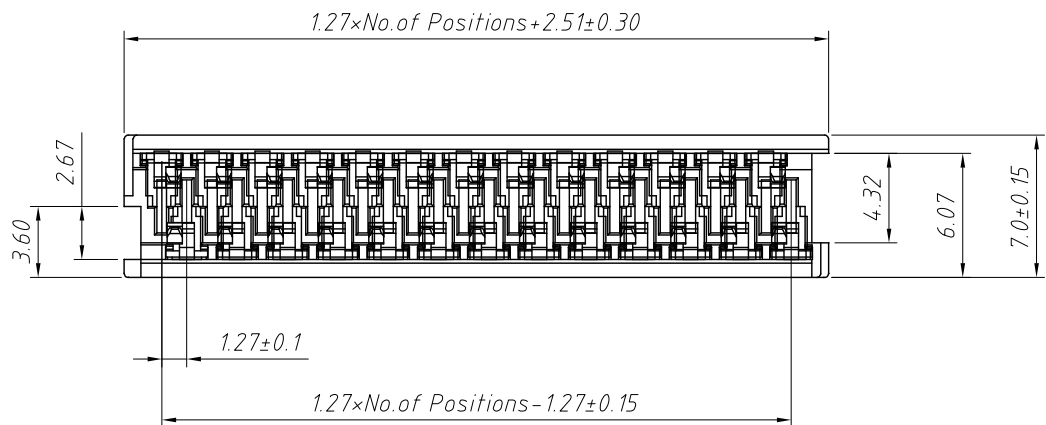

Recommended P.C.Board Layout

**Material:**  
 Housing: 30% Glass filled PBT UL94V-0  
 Contacts: Phosphor Bronze  
 Plating: Sn over 50u" nickel  
 Applicable Wire: 26AWG and 28AWG

**Electrical Characteristics:**  
 Current Rating: 1.0 AMP  
 Voltage Rating: 250V AC  
 Insulator Resistance: 1000M Ohm min.  
 Withstand Voltage: 500V AC / Minute  
 Contact Resistance: 20m Ohm max.  
 Operating Temperature: -40°C ~ +105°C

**Order Information:**

L-KLS1-206B-XX-W

L: RoHS  
 IDC connectors  
 1.27mm Pitch  
 XX-No. of 06~26pin  
 Color: W=White

ANGLE TOLERANCE	PROJECTION	Description:	1.27mm Pitch Molex 905847 Picoflex Dip Plug IDC Connector
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N: L-KLS1-206B-XX-W
x.x ±0.30	SHEET SIZE	A4	
x.xx ±0.20	Draw:	Daniel	2018-07-10
x.xxx ±0.10	Check:	Daniel	2018-07-10



NingBo KLS ELECTRONIC CO.,L TD.