
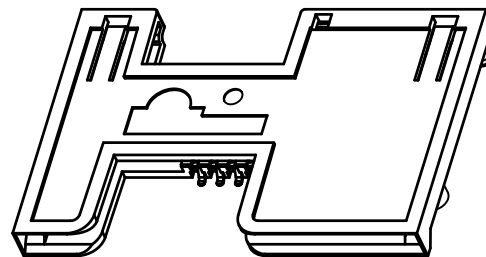


RECOMMEND PCB LAYOUT

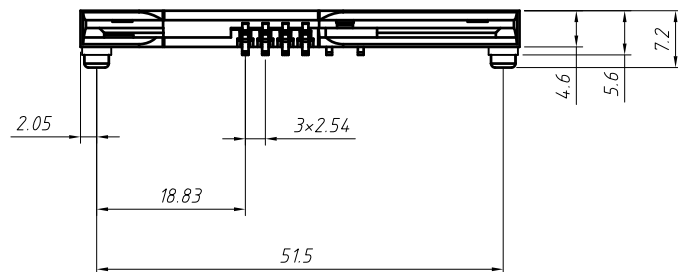

Electrical Characteristics

Plastic: black high temperature UL94V-0;

Terminal: copper alloy

Rated current: 1.0A max

Rated voltage: 50V AC/DC

Operating temperature: -40°C ~ +85°C

Contact resistance: 100m ohms max.

Withstand voltage: 500V AC / 1 minute

Insulation resistance: 1000M ohms min./500VDC

Durability times: 50000 times

Product temperature resistance: 260±5°C 10S

Flatness: 0.10mm MAX.

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X	±0.15	X	±5°	UNITS	mm	Smart Card Connector
X	±0.03	X	±3°	SHEET SIZE	A4	
XX	±0.05	XX	±2°		KLS P/N:	L-KLS1-ISC-F041
Draw by:	Jenny	Date:	2018-11-01	NingBo KLS ELECTRONIC CO.,LTD.		
Check by:		Date:				
SCALE		SHEET	1 OF 1			