



RECOMMEND PCB LAYOUT (FEMALE)
TOLERANCE=±0.05mm

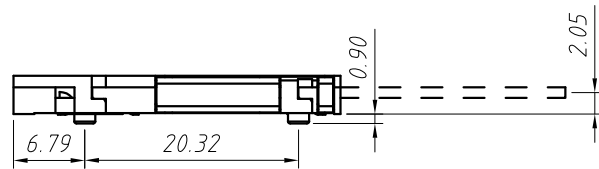

Material:
Housing: LCP, UL94V-0
Contact: Copper Alloy.

Electrical:
Current Rating: 2 A
Contact Resistance: 20mΩ max.
Insulation Resistance: 1000 MΩ min.
Dielectric Withstanding Voltage: AC 500V(r.m.s)/60s.
Operating Temperature: -55°C ~ +125°C
Temperature wave soldering Temperature: 260°, 5-10s

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X	±0.15	X	±5°	UNITS	mm	8Pin+Switch	
X	±0.03	X	±3°	SHEET SIZE	A4	Smart Card Connector	
XX	±0.05	XX	±2°		KLS P/N:	L-KLS1-ISC-F011C	
Draw by:	Jenny	Date:	2018-11-01	 NingBo KLS ELECTRONIC CO.,LTD.			
Check by:		Date:					
SCALE		SHEET	1 OF 1				