

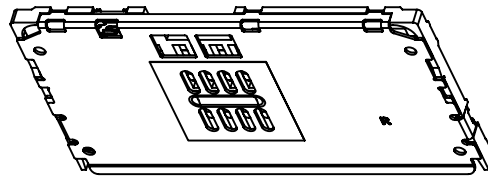
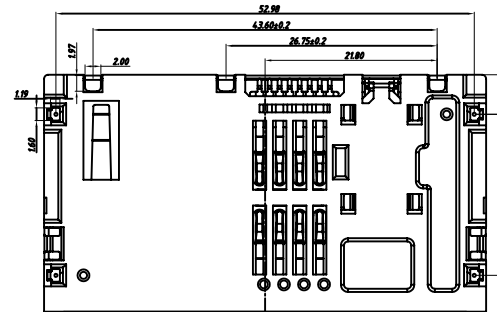


Mounting Hole Dimensions




Material:

- 1.Housing:LCP TIT30,Black,UL94V-0
- 2.Cover:SUS304,Whole 50u" nickel,Solder Gold Plated 1u" min
- 3.Terminal:C5210,Whole 50u" nickel>Contact Gold Plated 10u", Solder 100u" Tin plating
- 4.Switch shrapnel:SUS301
- 5.Switch:Tact Switch
- 6.Grounding piece:C5191,Whole 50u" nickel, Solder 100u" Tin plating
- 7.High temperature sticker

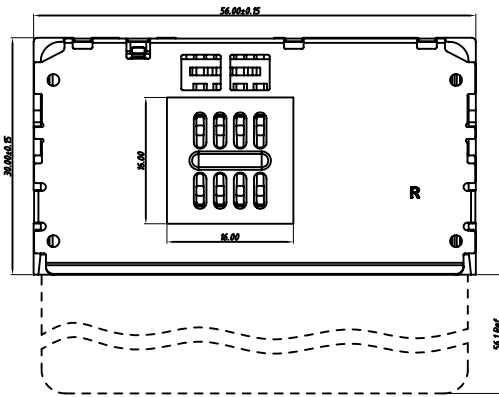

Electrical Characteristics

- Durability:500000 cycles min.
 Contact Resistance:50Ω typical,100Ω Max.
 Insulation Resistance:>1000MΩ/500V DC.
 Solderability
 Vapor phase:215°C.30sec.Max.
 IR reflow:260°C.10sec.Max.
 Manual soldering:370°C.3sec.Max.
- 4.Environmental Characteristics
 Operating Temperature:-40°C TO +85°C
 Operating humidity:10%~+95%RH.



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X.	±0.15	X.	±5°	UNITS	mm	Smart Card Connector PUSH PULL,8P+2P
.X	±0.03	.X	±3°	SHEET SIZE	A4	
.XX	±0.05	.XX	±2°		KLS P/N:	
Draw by:	Jenny	Date:	2018-11-01	NingBo KLS ELECTRONIC CO.,LTD.		
Check by:		Date:				
SCALE		SHEET	1 OF 1			