



1  
RoHS Compliance

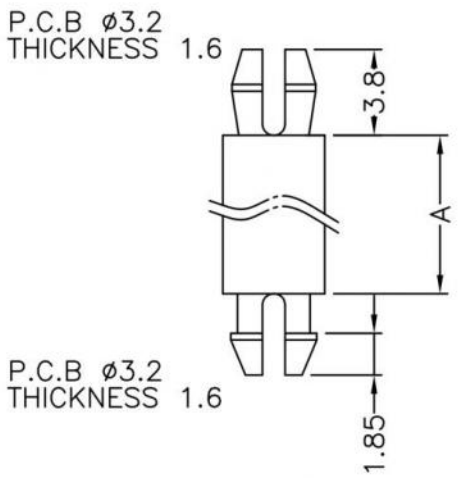

Item No.	A mm	PC board	
		PCB Hole	thickness
SP-03	3.2	$\phi 3.2$	1.6
SP-05	4.8	$\phi 3.2$	1.6
SP-06	6.4	$\phi 3.2$	1.6
SP-08	7.9	$\phi 3.2$	1.6
SP-8.5	8.5	$\phi 3.2$	1.6
SP-9.5	9.5	$\phi 3.2$	1.6
SP-10	10.0	$\phi 3.2$	1.6
SP-11	11.1	$\phi 3.2$	1.6
SP-13	12.7	$\phi 3.2$	1.6
SP-14	14.3	$\phi 3.2$	1.6
SP-16	15.9	$\phi 3.2$	1.6
SP-17	17.5	$\phi 3.2$	1.6
SP-19	19.1	$\phi 3.2$	1.6
SP-20	20.6	$\phi 3.2$	1.6
SP-21	21.0	$\phi 3.2$	1.6
SP-22	22.2	$\phi 3.2$	1.6
SP-25	25.4	$\phi 3.2$	1.6
SP-27	27.0	$\phi 3.2$	1.6
SP-28	28.5	$\phi 3.2$	1.6
SP-29	29.2	$\phi 3.2$	1.6
SP-34	34.9	$\phi 3.2$	1.6
SP-38	38.1	$\phi 3.2$	1.6

Material: NYLON 66(UL 94 V-2), NATURAL  
 Working temperature: 0°C ~ 80°C  
 Dipping Bibulous: 2.5% at 20°C 24H 50% Humidity  
 Withstand Voltage: 2500V/0.5mA/1m  
 Heat Resistance: B-130°C (30m without melting at 200 °C)  
 Application: the fixed PC board on the boards, free tools,

ANGLE TOLERANCE	PROJECTION	Description:	
$\pm 3^\circ$		Spacer Support	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x $\pm 0.30$	SHEET SIZE	A4	L-KLS8-0202A-SP-XX
x.xx $\pm 0.20$	Draw:	Daniel	2020-11-11
x.xxx $\pm 0.10$	Check:	Daniel	2020-11-11

