

PCB LAYOUT

$P=5.00\text{mm}$
 $\text{Length}(L)=P \times \text{Pole}$


Material
Housing: PA66, UL94V-0
Pin header: Brass, Tin-plate
Contact: Brass, Electroless nickel
Screws: M2.5, Steel, Zinc plated

Electrical
Rated voltage: 300V
Rated current: 15A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1min
Wire Range: 24~14AWG 2.5mm

Mechanical
Temp. Range: -40 °C ~ +105 °C
MAX Soldering: 250°C for 5 Sec.
Strip length: 6~7mm
Torque: 0.5Nm(4.5Lbin)

Order Information

L-KLS2-104-5.00-XXP-4 S XX

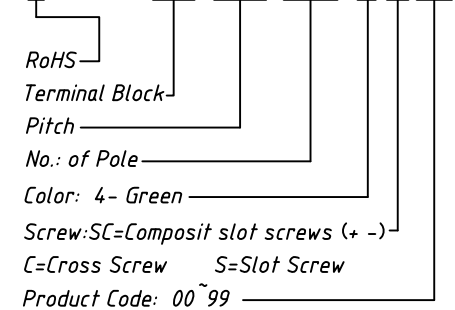

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	
X. ±0.60		X. ±5°		PCB Terminal block 5.0mm Pitch	
.X ±0.38		.X ±3°			
.XX ±0.25		.XX ±2°			
Draw by	2015-09-01	PROJECTION		KLS P/N:	L-KLS2-104-5.00-XXP-4S
Check by	2015-09-15	UNITS	mm		NingBo KLS ELECTRONIC CO.,L TD.
SCALE		SHEET SIZE	A4		