


1
RoHS Compliant

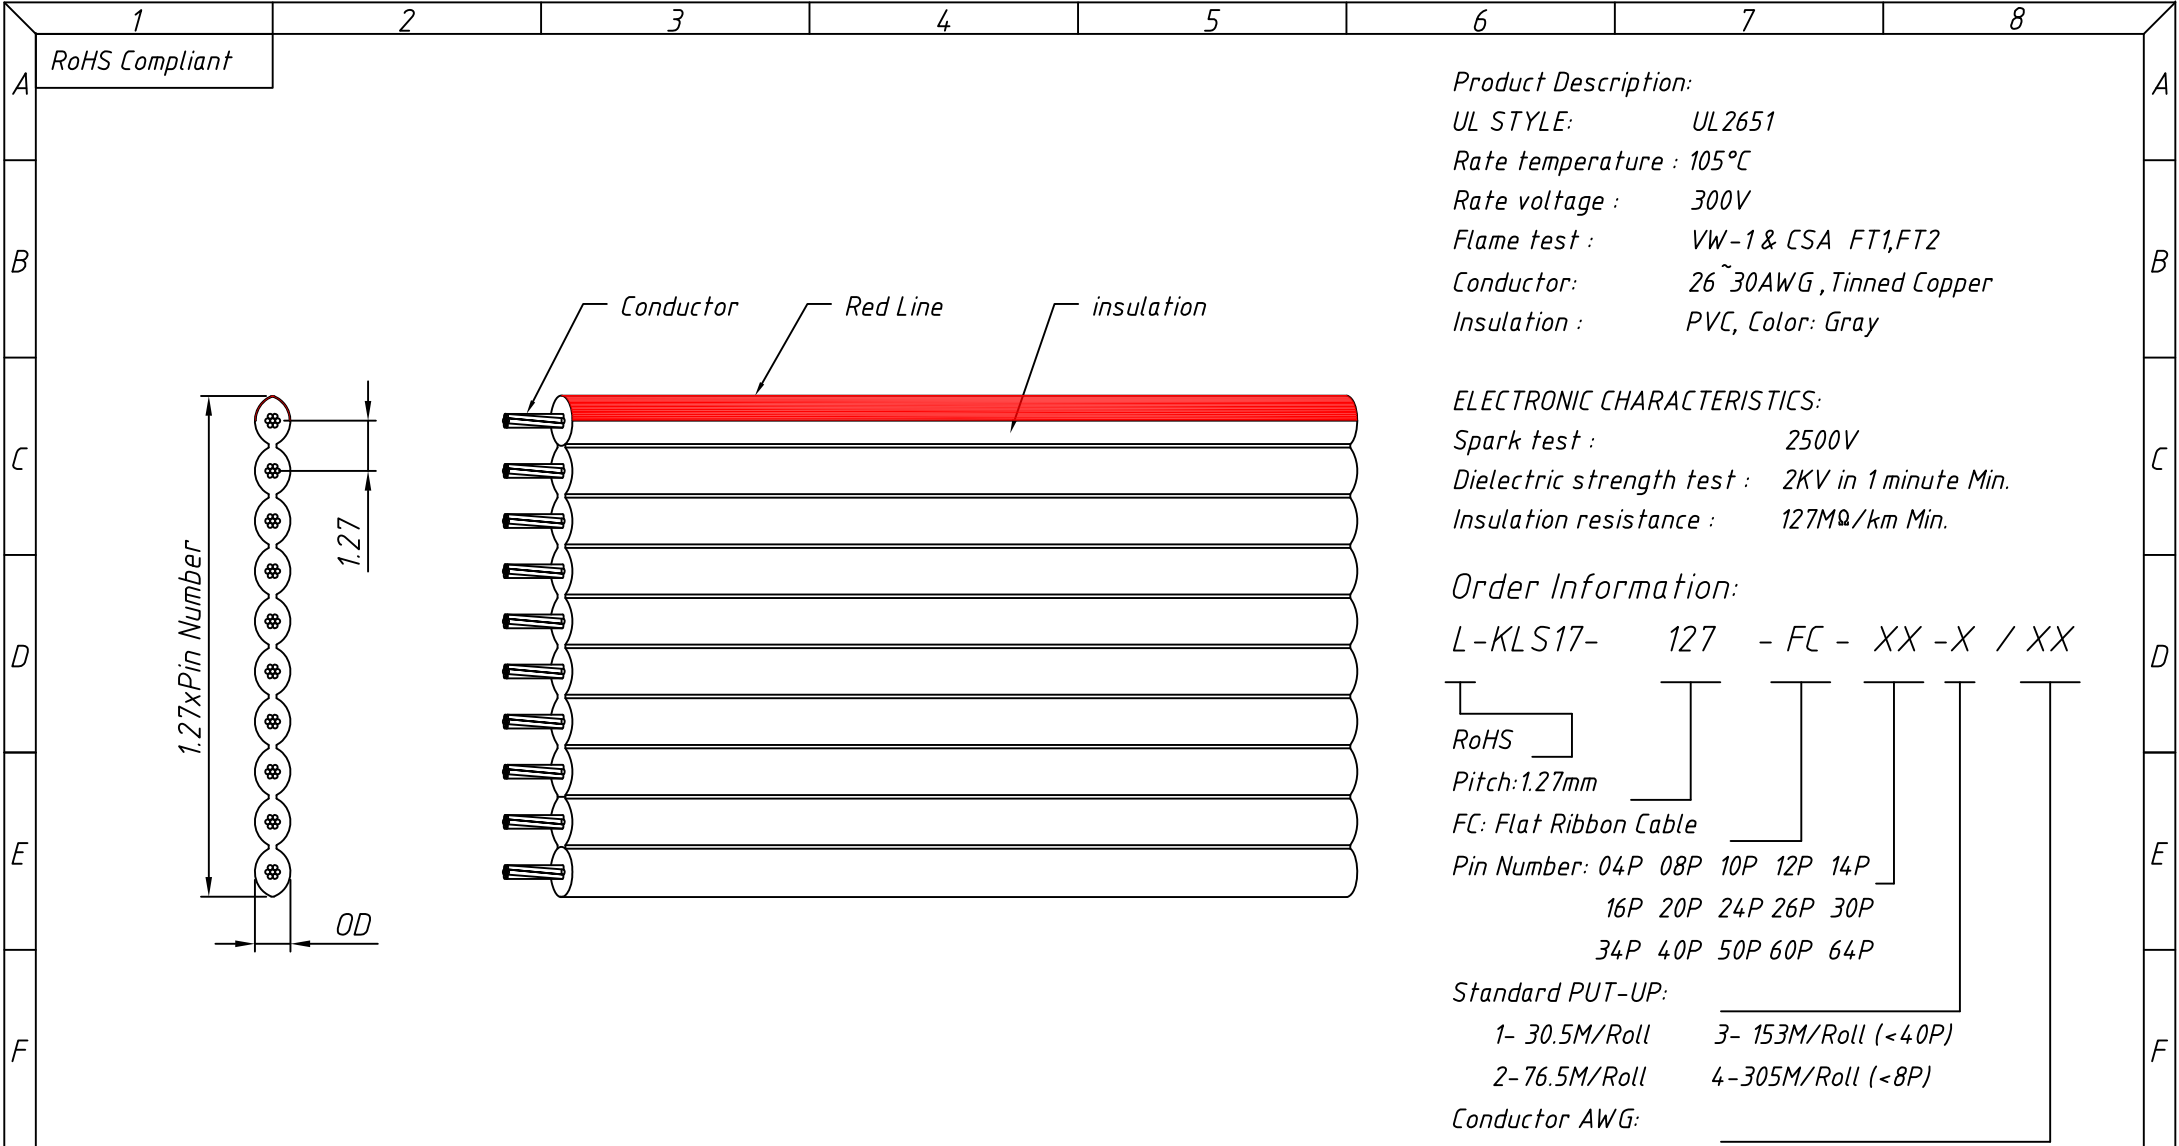

Product Description:
 UL STYLE: UL2651
 Rate temperature : 105°C
 Rate voltage : 300V
 Flame test : VW-1 & CSA FT1,FT2
 Conductor: 26~30AWG , Tinned Copper
 Insulation : PVC, Color: Gray

ELECTRONIC CHARACTERISTICS:
 Spark test : 2500V
 Dielectric strength test : 2KV in 1 minute Min.
 Insulation resistance : 127MΩ/km Min.

Order Information:
 L-KLS17- 127 - FC - XX -X / XX

RoHS

Pitch:1.27mm

FC: Flat Ribbon Cable

Pin Number: 04P 08P 10P 12P 14P

16P 20P 24P 26P 30P

34P 40P 50P 60P 64P

Standard PUT-UP:

1- 30.5M/Roll 3- 153M/Roll (<40P)

2- 76.5M/Roll 4- 305M/Roll (<8P)

Conductor AWG:

None - 30AWG(7/0.10TS)

28 - 28AWG(7/0.12TS)

26 - 26AWG(7/0.16TS)

AWG	Conductor			Insulation		Conductor resistance Max. at 20°C,DC Ω/km
	Construction mm	DIA. mm	Pin Number	Thickness mm	OD mm	
30	7/0.10	0.30	4~64	0.26	0.85	376.96
28	7/0.12	0.39	4~64	0.26	0.90	237.25
26	7/0.16	0.49	4~64	0.26	1.00	148.94

		Description:	
PROJECTION		1.27mm Pitch UL2651 Flat Ribbon Cable	
UNITS	mm	KLS P/N:	L-KLS17-127-FC-XX-X/XX
SHEET SIZE	A4	NingBo KLS ELECTRONIC CO.,L TD.	
Draw:Daniel	2021-01-30		
Check:Daniel	2021-01-30		