


1 RoHS Compliance





2 3 4 5 6 7 8

A B C D E F G H

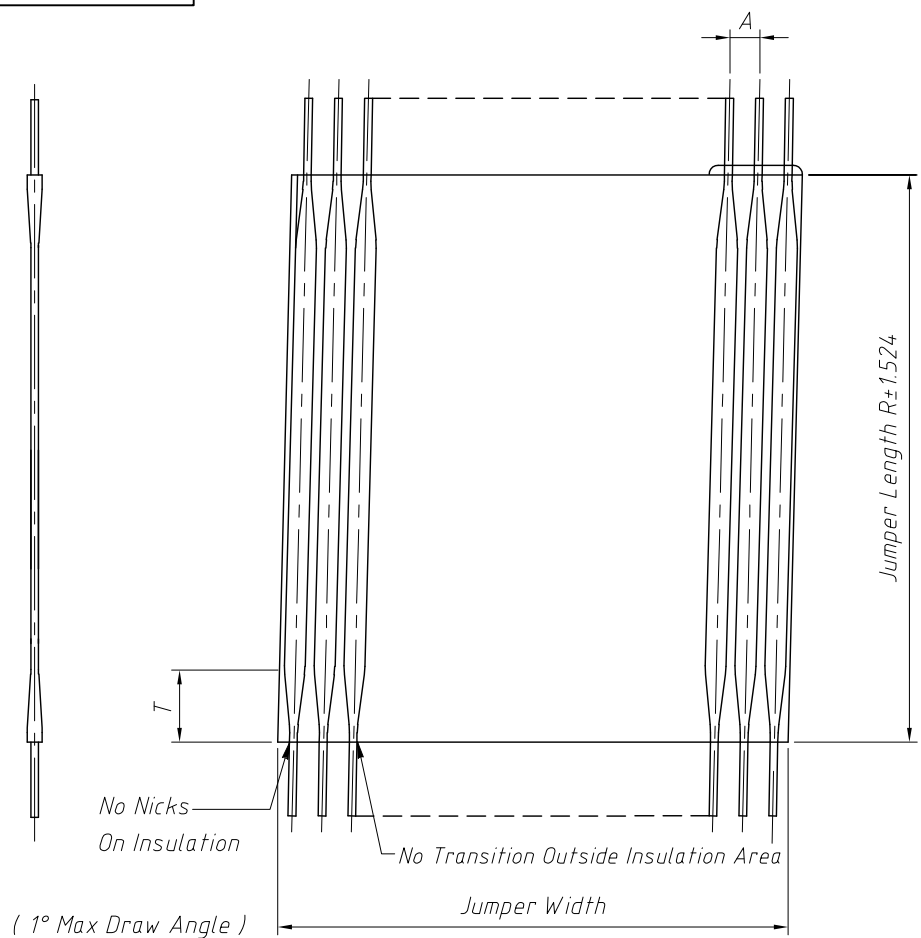


S-STRAIGHT PINS

R-RIGHT ANGLE PINS
(BENT DOWN)

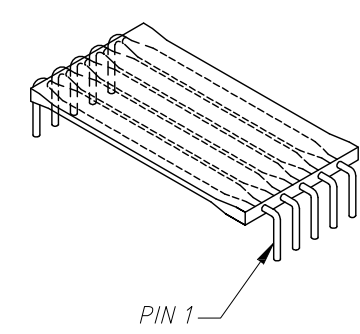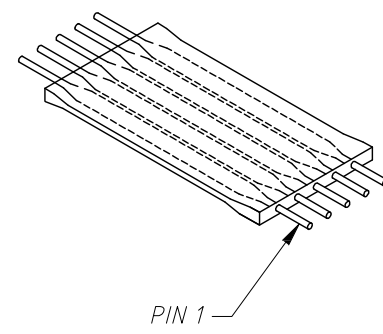

Order Information:


L-KLS17-JA-127-02-L030-S

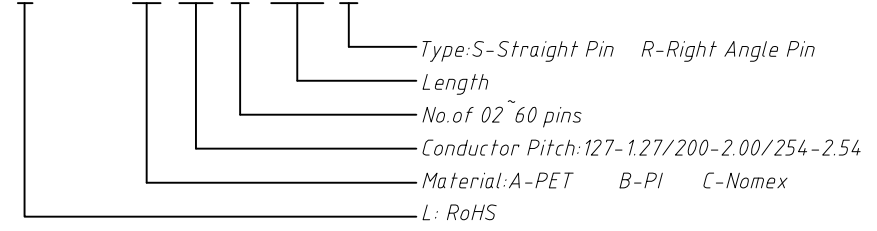

Pitch Nominal	Transition Max
A	T
1.27	4.32
2.00	5.08
2.54	6.35

Recommended PCB Hole Drilling Details Are As Follows:

Pitch A	ØG
1.27	0.70
2.00	0.80
2.54	0.95

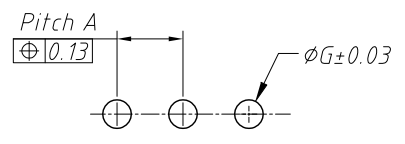

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Flexstrip Pin Configurations
GENERAL TOLERANCE	UNITS	KLS P/N:
x.x ±0.30	SHEET SIZE	L-KLS17-JA-127-02-L030-S
x.xx ±0.20	Draw:	1 / 1 Page
x.xxx ±0.10	Check:	Daniel 2021-08-11



NingBo KLS ELECTRONIC CO.,L TD.

1 2 3 4 5 6 7 8

H