

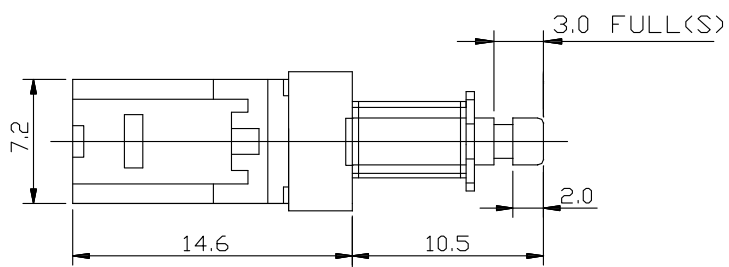
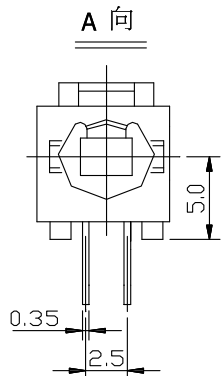



1  
RoHS Compliance

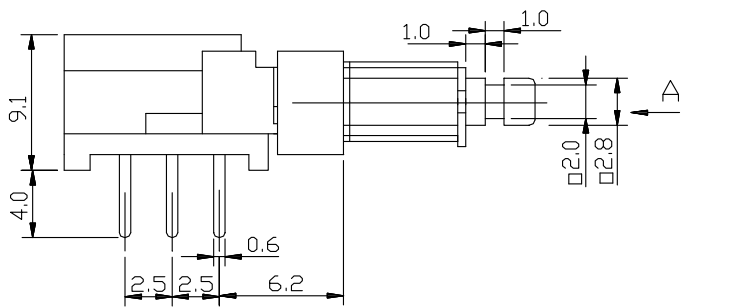

P.C.B HOLE DETAIL




SCHEMATIC



**ELECTRICAL**  
 Rating: 0.1A 30V DC  
 PIN Pitch: 2.5mm  
 Operating Force: 230 ± 50gf  
 Insulation Resistance: 100 MΩ Min. 250V DC  
 Contact Resistance: 50MΩ Max.  
 Withstand Voltage: AC 250 V 1 Minute  
 Operating Temperature: -25°C ~ +70°C  
 Mechanical Life: 30,000 cycles  
 Electrical Life: 10,000 cycles  
**FUNCTION:**  
 L = Lock Type  
 N = Non Lock Type  
 Approvals : RoHS

Order Information:

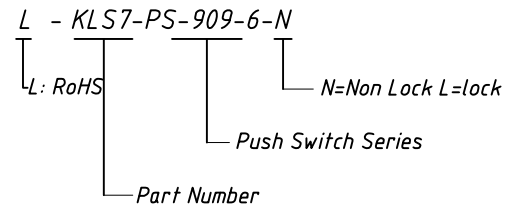

ANGLE TOLERANCE	PROJECTION	Description:	Push switches
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	KLS7-PS-909-6
x.xx ±0.20	Draw:	Daniel	2020-11-11
x.xxx ±0.10	Check:	Daniel	2020-11-11



NingBo KLS ELECTRONIC CO.,L TD.