





1
RoHS Compliance

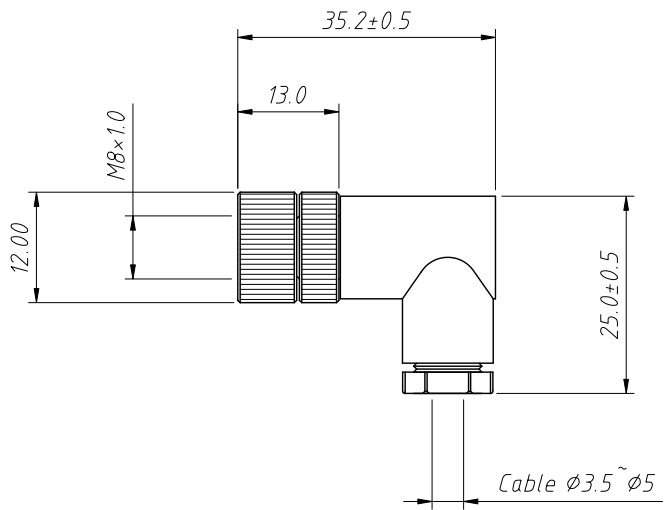

L-KLS15-M8A-TR203



L-KLS15-M8A-TR204



Material:
Insulation:PBT/PA,UL 94 V-0,Black.
Connector Pin:Brass,0.025u"Gold plated
Nut/Screw:Brass,Nickel plating

Electrical Characteristics:
Rated current:4A
Rated voltage:03Pin 60V,04Pin 30V
Contact Resistance:3mΩ Max

Mechanical properties:
IP rating:IP67
Wire gauge:20~26AWG / 0.14~0.50mm²
Mechanical characteristics:mating/cycle>100 cycle
Operating Temperature:-40°C ~ + 85°C

Order Information:
L-KLS15-M8A-TR2 03
L: RoHS
Screw type:M8
A:A-Coding
Type:
TR1:R/A Plug Code (Male Pin)
TR2:R/A Plug Code (Female Pin)
Number of Contacts:(03P 04P)

ANGLE TOLERANCE	PROJECTION		Description:
±3°			IP67 M8 A-coding R/A Plug Female Connector
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS15-M8A-TR203
x.xx ±0.20	Draw:	Daniel	2022-04-01
x.xxx ±0.10	Check:	Daniel	2022-04-01

