



Product Code:

L-KLS3-SMT-17*06C



Picture:



Specification:


Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3~16
*Rated Current	(mA)	≤12
*Sound Output at 10cm	(dB)	≥90
*Resonance Frequency	(KHz)	4.0±0.5
Tone		Continuous
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	1.7
Housing Material		PPS
RoHS		Yes
MSL(Moisture Sensitivity Level)		5a(≤30°C/60%RH 24H Floor life)

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

SPL & Current Consumption vs. Input Voltage:

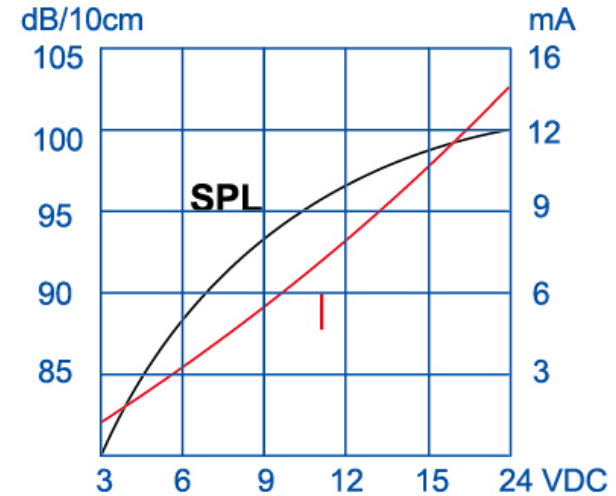

Dimensions (Unit: mm)

Tolerance: ±0.5mm Except Specified

