


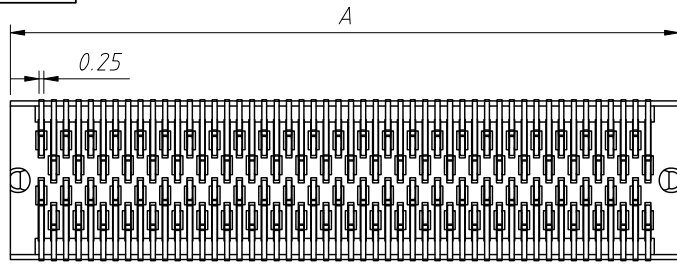


RoHS Compliance





H	H1
6.35	5.59
8.00	7.23
10.00	9.23
12.00	11.23

Specifications:
 Current Rating: 2.0A AC/DC
 Voltage Rating: 100V AC/DC
 Contact Resistance: Initial Value/30mΩ Max.
 After Environmental Tests/60mΩ Max
 Insulation Resistance: 300MΩ Min
 Withstanding Voltage: 500V AC/Minute
 Temperature Range: -55°C To +125°C


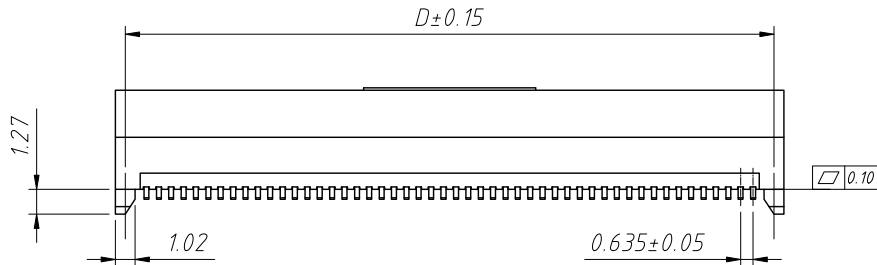


No Of Rows	A	B	C	D
4x5	8.89	7.11	5.08	7.87
4x10	15.24	13.46	11.43	14.22
4x15	21.59	19.81	17.78	20.57
4x20	27.94	26.16	24.13	26.92
4x25	34.29	32.51	30.48	33.27
4x30	40.64	38.86	36.83	39.62
4x35	46.99	45.21	43.18	45.97
4x40	53.34	51.56	49.53	52.32
4x45	59.69	57.91	55.88	58.67
4x50	66.04	64.26	62.23	65.02

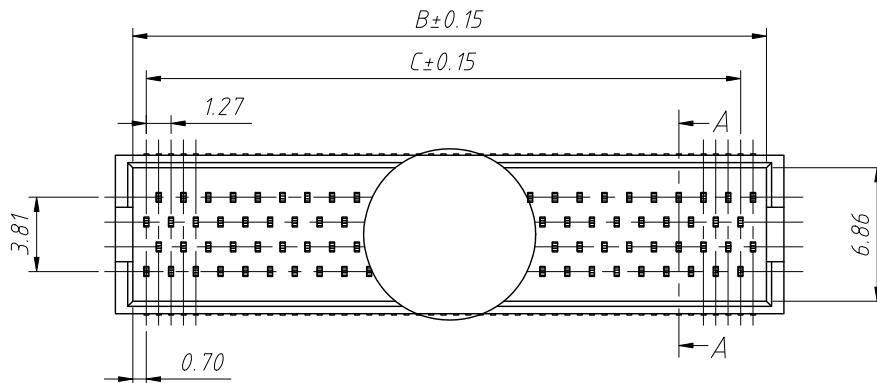

Conditioning Information:
 L-KLS1-B0212-559 M XXP-TR

L: RoHS
 Board To Board
 Pitch-1.27mm
 Height-5.59mm
 Type:M-Male
 XX-No. Of Contact
 Installation mode:
 T=SMD Without Post, T3=SMD With Post
 Packing:R=Reel T=Tube

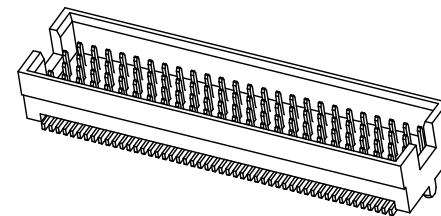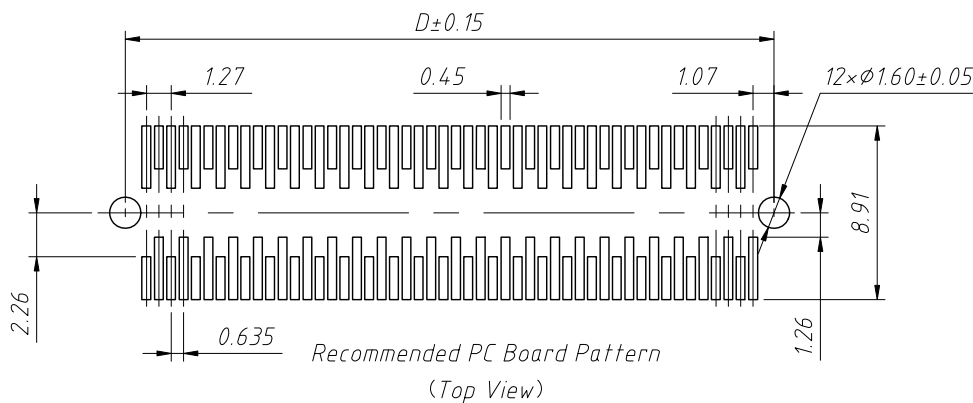

ANGLE TOLERANCE	PROJECTION	Description:
±3°		1.27mm Board To Board Plug
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Daniel 2022-06-14
x.xxx ±0.10	Check:	Daniel 2022-06-14

L-KLS1-B0212-559MXXP-TR
 NingBo KLS ELECTRONIC CO.,L TD.

RoHS Compliance











Table	
H	
6.35	
8.00	
10.00	
12.00	

No Of Rows	A	B	C	D
4x5	8.89	6.85	5.08	7.87
4x10	15.24	13.20	11.43	14.22
4x15	21.59	19.55	17.78	20.57
4x20	27.94	25.90	24.13	26.92
4x25	34.29	32.25	30.48	33.27
4x30	40.64	38.60	36.83	39.62
4x35	46.99	44.95	43.18	45.97
4x40	53.34	51.30	49.53	52.32
4x45	59.69	57.65	55.88	58.67
4x50	66.04	64.00	62.23	65.02

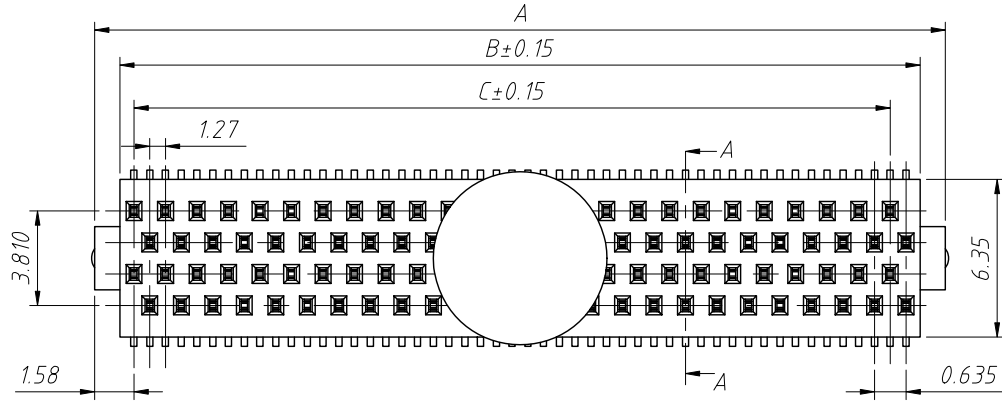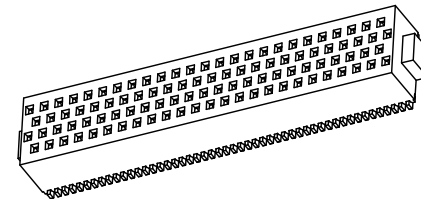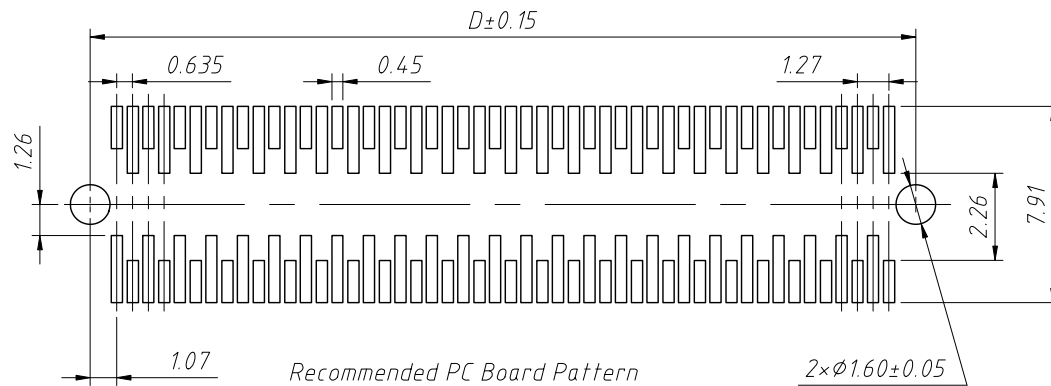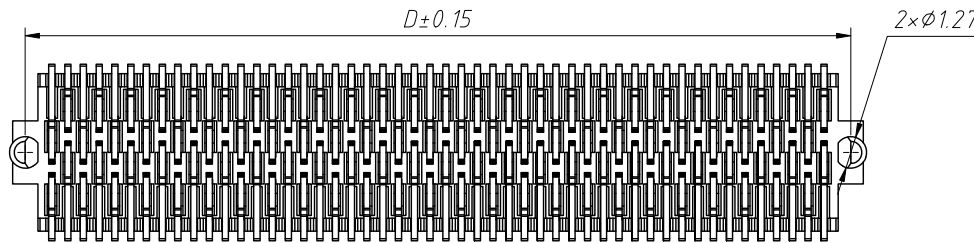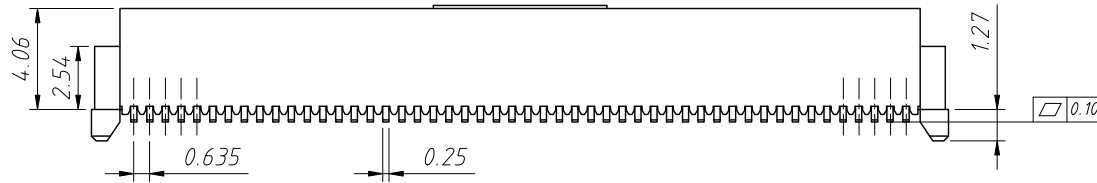

Conding Information:

L-KLS1-B0212- 457 F XXP -TR

L: RoHS

Board To Board

Pitch-1.27mm

Height-4.57mm

Type:F-Female

XX-No. Of Contact

Installation mode:

T=SMD Without Post, T3=SMD With Post

Packing:R=Reel T-Tube

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		1.27mm Board To Board Socket	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-B0212-457FXXP-TR
x.xx ±0.20	Draw:	Daniel	2022-06-14
x.xxx ±0.10	Check:	Daniel	2022-06-14



NingBo KLS ELECTRONIC CO.,L.TD.