
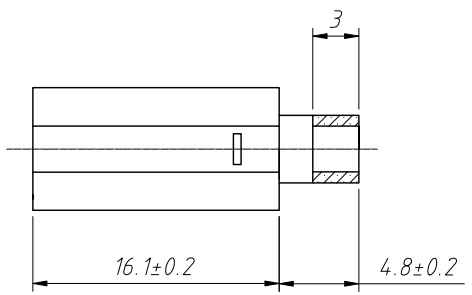
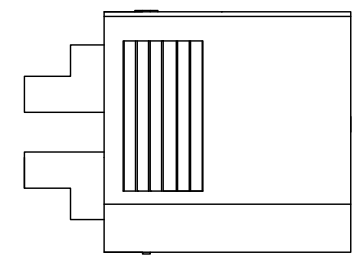

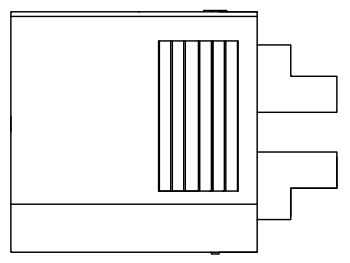
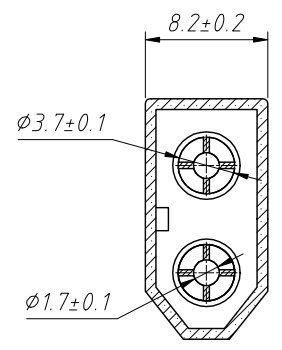


1
RoHS Compliance

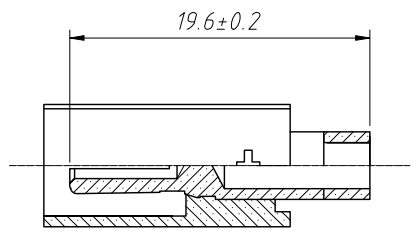


Order Information:
 L-KLS1-XT60-F-8
 L: RoHS
 Product series
 Type:
 F-Female M-Male
 Color:8- Yellow






Material:
 Female Housing:PA66 UL94-V2, Yellow Color
 Male Terminal:H59 Brass, Gold Plated
 Weight:3.0g
 Package Way:500PCS/Bag

Electrical Characteristics:
 Instant current:60A
 Rated current:30A
 Rated voltage:DC500V
 Contact resistance:0.55mΩ
 Operating temperature:-20oC ~ +130oC
 Recommended wire gauge:14AWG

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		XT60 Female Housing Contains Male Terminal	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-XT60-F-8
x.xx ±0.20	Draw:	Daniel	2022-08-25
x.xxx ±0.10	Check:	Daniel	2022-08-25




1
RoHS Compliance

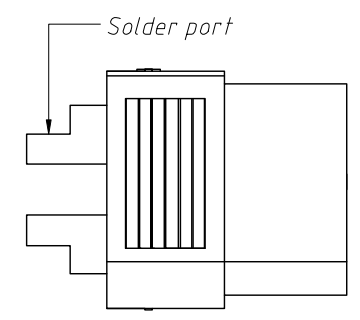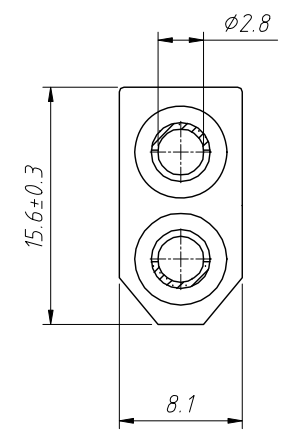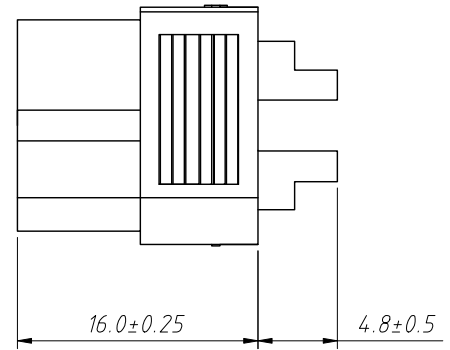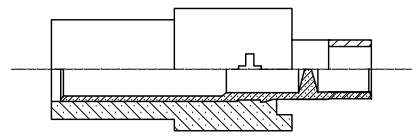

Order Information:

L-KLS1-XT60-M-8
 L: RoHS
 Product series
 Type:
 F-Female M-Male
 Color:8-Yellow

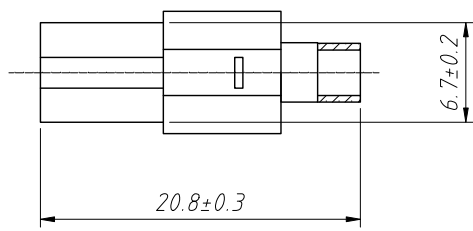

Material:

Male Housing:PA66 UL94-V2, Yellow Color
 Female Terminal:H59 Brass, Gold Plated
 Weight:2.8g
 Package Way:500PCS/Bag

Electrical Characteristics:

Instant current:60A
 Rated current:30A
 Rated voltage:DC500V
 Contact resistance:0.55mΩ
 Operating temperature:-20oC ~ +130oC
 Recommended wire gauge:14AWG

ANGLE TOLERANCE	PROJECTION	Description:
±3°		XT60 Male Housing Contains Female Terminal
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Daniel 2022-08-25
x.xxx ±0.10	Check:	Daniel 2022-08-25
		KLS NingBo KLS ELECTRONIC CO.,LTD.