


Cable Ties Series

KLS8-0903 Mountable Head Cable Ties Series

Material : UL Approved Nylon6/6, 94V-2

The cable tie can be secured to panel with panel with a single bolt.

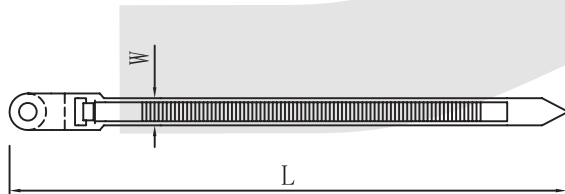


VIII

Part NO. 100pcs/bag	Part NO. 1000pcs/bag	Length mm (inch)	Width mm (inch)	Max. Bundle Dia mm (inch)	Min. Loop Tensile Strength kg (lbs)
KLS8-0903-110MC	KLS8-0903-110M	110 (4.33)	2.5 (.10)	22 (.87)	8.1 (18)
KLS8-0903-150IC	KLS8-0903-150I	150 (5.91)	3.6 (.14)	32 (1.26)	18.2 (40)
KLS8-0903-200STC	KLS8-0903-200ST	200 (7.87)	4.8 (.19)	50 (1.97)	22.2 (50)
KLS8-0903-300STC	KLS8-0903-300ST	319 (12.56)	4.8 (.19)	76 (2.99)	22.2 (50)
KLS8-0903-370ST	-	389 (15.31)	4.8 (.19)	105 (4.13)	22.2 (50)
KLS8-0903-200HD	-	215 (8.46)	7.6 (.30)	50 (1.97)	54.4 (120)
KLS8-0903-300HD	-	305 (12.01)	7.6 (.30)	76 (2.99)	54.4 (120)
KLS8-0903-380HD	-	375 (14.76)	7.6 (.30)	98 (3.86)	54.4 (120)

ORDER INFORMATION

KLS8 - 0903 - 110MC



All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information