



Front view



Back view

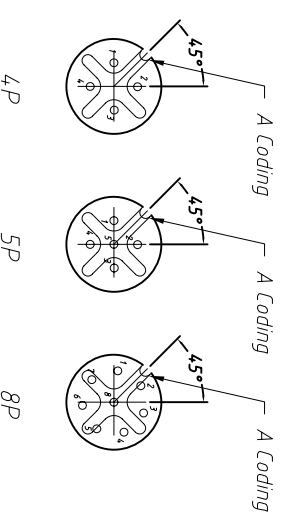

Electrical & Mechanical data

IP rating: IP67

Contacts resistance: $\leq 5 \text{ m}\Omega$

Insulation resistance: $\geq 100 \text{ M}\Omega$

Orientation: PCB 180° Front Lock

Over mold/ Shell: Metal shell

Connector contacts: Brass with gold plated

Coupling nut/screw: Brass with nickel plated screw

Insert/ Housing: PA66 + GF

Sealing: O-ring

Temperature Range: $-25^\circ\text{C} \sim +80^\circ\text{C}$

	4 Pin	5 Pin	8 Pin
Rated current	4A	4A	2A
Rated voltage	250V	60V	30V

Order information

L-KLS15-M12 A-S1 XX

- L: Rohs
- M12: Screw type
- A: A-Coding
- St: PCB 180°, Panel mount, Front lock, Female
- XX: Number of Contacts

GENERAL TOLERANCE

X: ± 0.60
 .X: ± 0.38
 .XX: ± 0.25

ANGLE TOLERANCE

X: $\pm 5^\circ$
 .X: $\pm 3^\circ$
 .XX: $\pm 2^\circ$

Draw by:	PROJECTION	mm
Check by:	UNITS	
	SHEET SIZE	A4

Description: PCB 180° connector, Panel mount, Front lock, Automation technology, M12, Female

KLS P/N: KLS15-M12A-S1XX

KLS ELECTRONIC CO., LTD.